


WAAS CH 62911 W30A	APP CRS 303°	Rwy Idg 10201 TDZE 1380 Apt Elev 1384
--	------------------------	--

RNAV (GPS) Y RWY 30C
PHOENIX-MESA GATEWAY (IWA)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C (29°F) or above 35°C (95°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting and increase LPV DA to 1660 feet, LNAV/VNAV DA to 1710 feet and all MDA 80 feet; increase LPV all Cats visibility 1/8 SM, increase LNAV/VNAV all Cats, LNAV Cats C, D and E, and Circling Cats D, E visibility 1/4 SM. VDP and Baro-VNAV NA with Phoenix Sky Harbor Intl altimeter setting.

MISSED APPROACH:
Climb to 2800 then climbing left turn to 5000 direct GICGE and hold.

ATIS ★ 133.5 270.275	PHOENIX APP CON 124.9 353.8	GATEWAY TOWER ★ 120.6 (CTAF) 289.4	GND CON 128.25 275.8	CLNC DEL 135.05
--------------------------------	---------------------------------------	--	--------------------------------	---------------------------

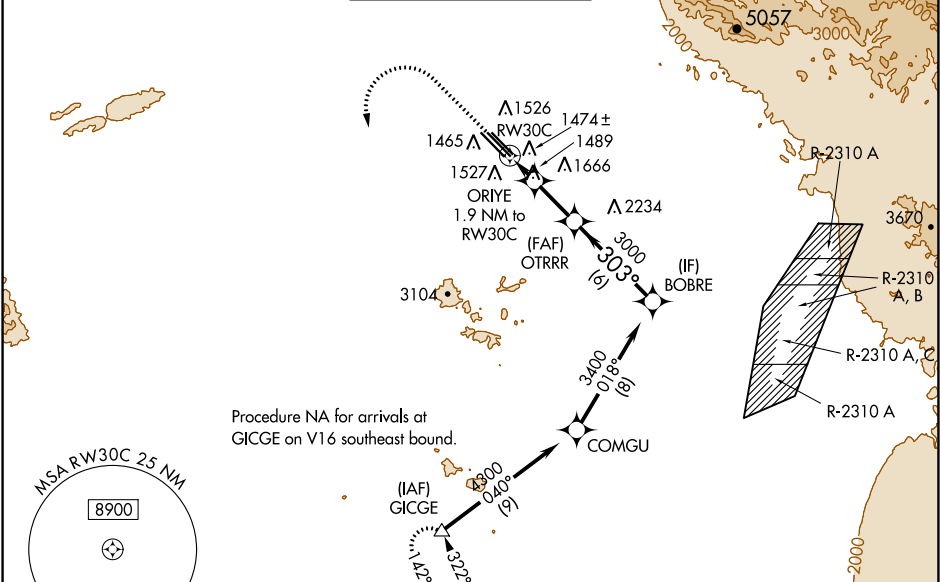

ELEV 1384		D TDZE 1380	
2800 5000 GICGE		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 49).	
*LNAV only.		ORIYE 1.9 NM to RW30C	
*1.2 NM to RW30C		OTRRR 3000	
RW30C		303° 3400	
2020*		GP 3.00° TCH 42	
1.2 NM 0.7		3.1 NM 6 NM	
CATEGORY	A	B	C D E
LPV DA	1580-3/4 200 (200-3/4)		
LNAV/VNAV DA	1630-7/8 250 (300-7/8)		
LNAV MDA	1800-1 420 (500-1)	1800-1 1/8 420 (500-1 1/8)	
CIRCLING	1880-1 496 (500-1)	1880-1 1/2 496 (500-1 1/2)	2000-2 616 (700-2) 2040-2 1/4 656 (700-2 1/4)

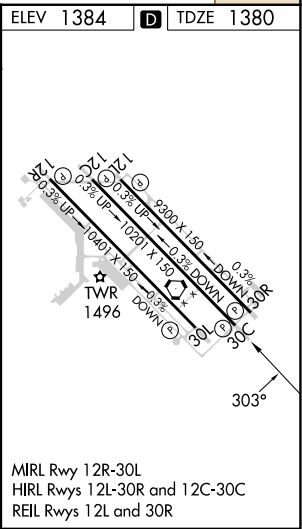

SW-4, 21 MAR 2024 to 18 APR 2024

SW-4, 21 MAR 2024 to 18 APR 2024