

DAYTON, OHIO

AL-107 (FAA)

23110

WAAS CH 86914 W18A	APP CRS 185°	Rwy Idg 8502 TDZE 996 Apt Elev 1009
--	------------------------	--

RNAV (GPS) RWY 18

JAMES M COX DAYTON INTL (DAY)


RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct GUPNE and track 255° to CAMMS and hold.

ATIS 125.8	COLUMBUS APP CON 118.425 323.15	DAYTON TOWER 119.9 257.7	GND CON 121.9	CLNC DEL 121.75
---------------	------------------------------------	-----------------------------	------------------	--------------------

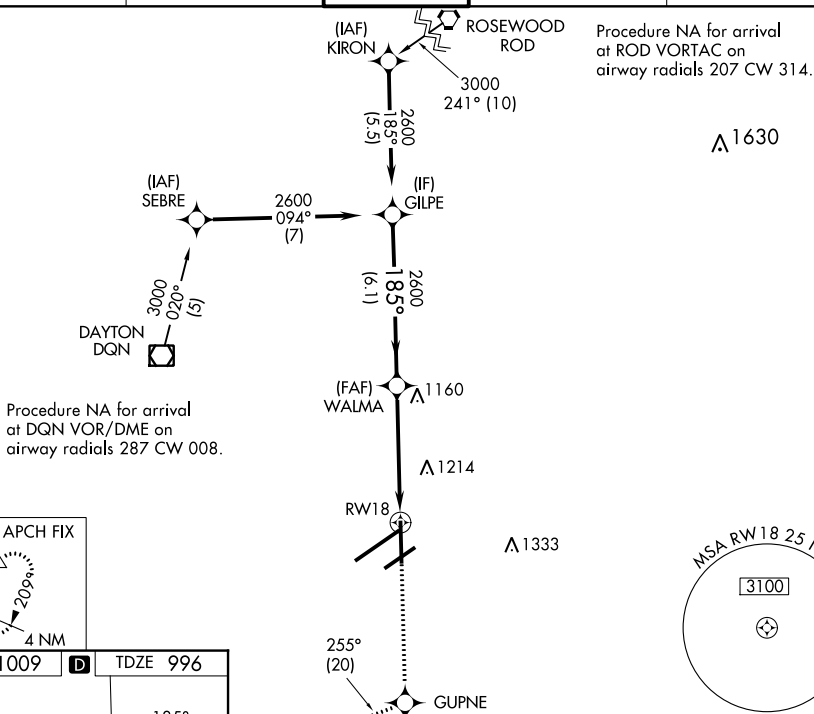

3000	GUPNE ↑ ✱	fr 255°	CAMMS △						
* LNAV only		* 1.2 NM to RW18							
CATEGORY	A	B	C	D					
LPV DA **	1196/24 200 (200-½)								
LNAV/VNAV DA	1274/24 278 (300-½)								
LNAV MDA	1420/24 424 (500-½)				1420/40		424 (500-¾)		
C CIRCLING	1580-1 571 (600-1)				1580-1½ 571 (600-1½)		1640-2 631 (700-2)		

DAYTON, OHIO

Amdt 2 05DEC19

39°54'N-84°13'W

JAMES M COX DAYTON INTL (DAY)
RNAV (GPS) RWY 18

EC-2, 21 MAR 2024 to 18 APR 2024