

WAAS CH 61035 W32A	APP CRS 323°	Rwy Idg 6380 TDZE 902 Apt Elev 926
--	------------------------	---

RNAV (GPS) RWY 32



PIEDMONT TRIAD INTL (GSO)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C (14°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Smith Reynolds altimeter setting. When local altimeter setting is not received use Smith Reynolds altimeter setting: increase all DA 38 feet and all MDA 40 feet, increase LNAV/VNAV all Cats and LNAV Cats C/D visibilities ½ mile, increase Circling Cats C/D visibility ¼ mile.

MISSED APPROACH:
Climb to 3700 direct
FAMOV and hold.

D-ATIS 128.55	GREENSBORO APP CON 124.35 269.225 126.6 327.075 (250°-049°) (050°-249°)	GREENSBORO TOWER 119.1 290.325	GND CON 121.9 348.6	CLNC DEL 121.75
-------------------------	--	--	-------------------------------	---------------------------

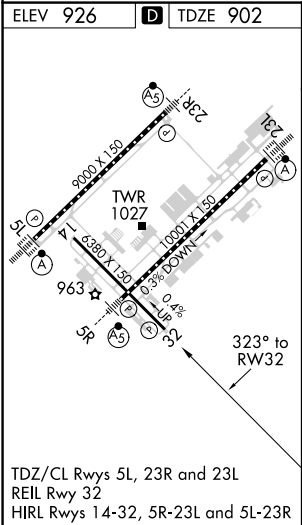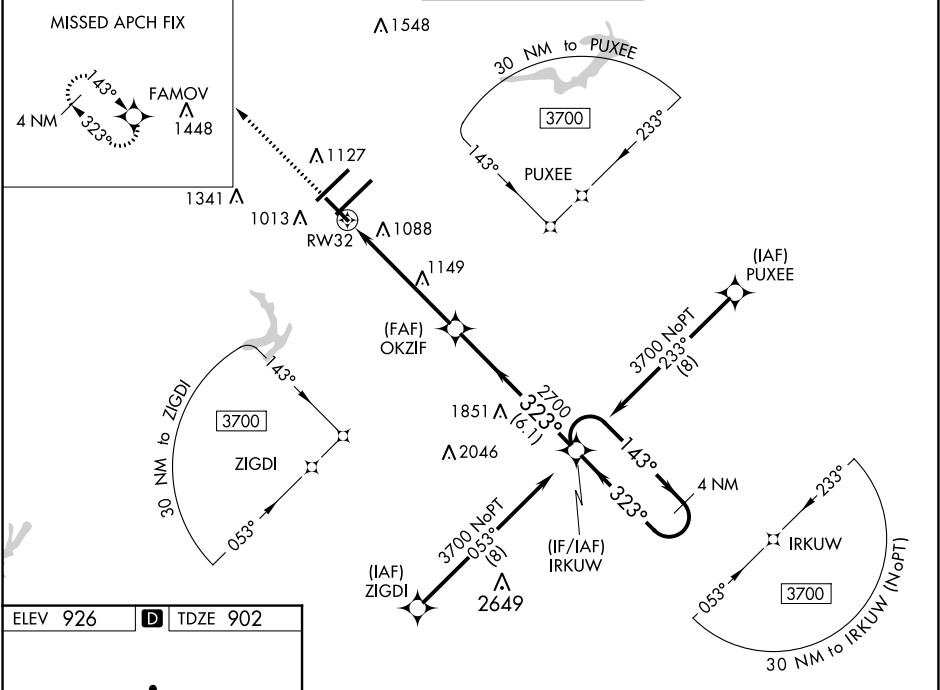

3700

↑

FAMOV

✦

*LNAV only.

IRKUW

4 NM

Holding Pattern

OKZIF

2700

RW32

1.4 NM to RW32

GP 3.00°

TCH 52

3700

143°

323°

2700

323°

1.4 NM

4.1 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA	1102-¾		200 (200-¾)	
LNAV/VNAV DA	1419-1¾		517 (500-1¾)	
LNAV MDA	1400-1	498 (500-1)	1400-1⅜	498 (500-1⅜)
C CIRCLING	1440-1	514 (600-1)	1700-2¼ 774 (800-2¼)	1700-2½ 774 (800-2½)