

LOC I-LSE <u>111.1</u>	APP CRS 180°	Rwy Idg TDZE Apt Elev	8536 653 656
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 18
LA CROSSE RGNL (LSE)

RADAR required for procedure entry.



Circling Rwy 22 NA at night. For inop ALS increase UPOCI fix minimums S-LOC Cats C/D visibility to 1 $\frac{3}{8}$ SM.


MALSR





MISSED APPROACH: Climb to 2400 then climbing right turn to 3400 direct ODI VORTAC and hold.

ATIS 124.95	MINNEAPOLIS CENTER 128.6 363.0	LA CROSSE TOWER * 118.45 (CTAF) 0 251.075	GND CON 121.8	UNICOM 122.95
----------------	-----------------------------------	--	------------------	------------------


ALTERNATE
MISSED APCH FIX



NODINE
117.9 ODI
Chan 126

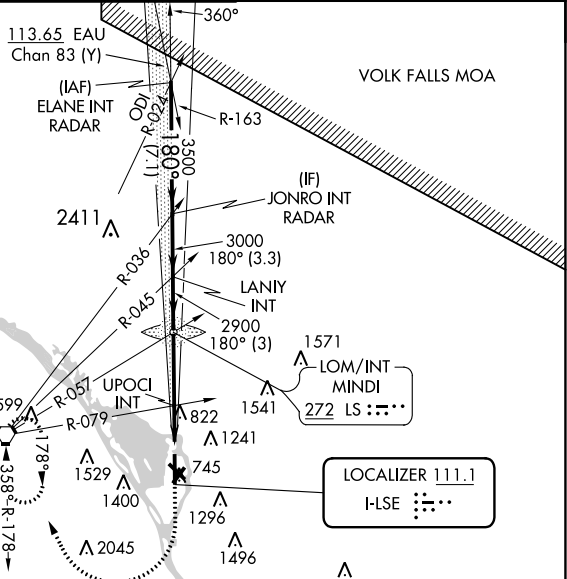

ELEV 656	D	TDZE 653
----------	----------	----------

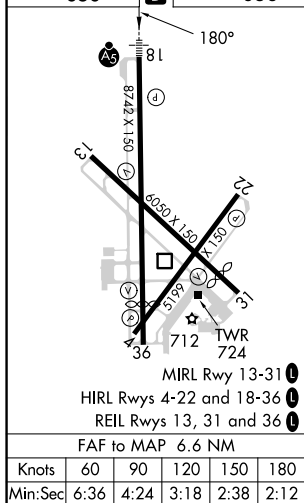

CATEGORY	A	B	C	D
S-ILS 18	853-1/2 200 (200-1/2)			
S-LOC 18	1600-3/4 947 (1000-3/4)	1600-2 947 (1000-2)		
CIRCLING	1600-1 1/4 944 (1000-1 1/4)	1760-3 1104 (1200-3) 1820-3 1164 (1200-3)		
UPOCI FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 18	1140-1/2 487 (500-1/2)	1140-1 487 (500-1)		
CIRCLING	1140-1 484 (500-1)	1460-1 804 (900-1)	1760-3 1104 (1200-1)	1820-3 1164 (1200-3)