

ZEYOU ONE DEPARTURE (OBSTACLE) (RNAV)

RNAV-1 GPS.

CLEVELAND DEP CON
125.35 346.325
ATIS 125.25
CLNC DEL
339.8
121.9 (when tower closed)
GND CON 121.9 339.8
LAKEFRONT TOWER★
124.3 (CTAF) 339.8

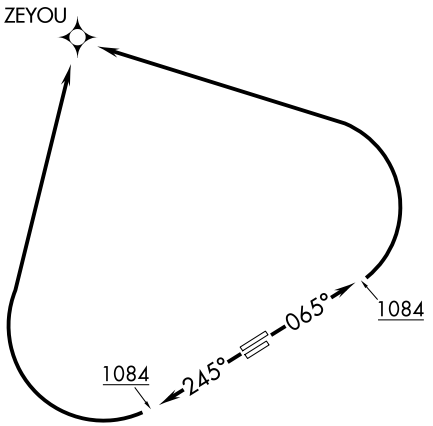

TAKEOFF MINIMUMS:
Rwy 6L: 300-1¼ with minimum climb of 220′ per NM to 900.
Rwy 6R: 300-1½ with minimum climb of 290′ per NM to 1000.
Rwy 24L: 400-1⅜ or Standard with minimum climb of 757′ per NM to 1000.
Rwy 24R: 300-1 or Standard with minimum climb of 490′ per NM to 900.



NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 6L/R: Climb on heading 065° to 1084, then climbing left turn direct ZEYOU, thence...
TAKEOFF RUNWAYS 24L/R: Climb on heading 245° to 1084, then climbing right turn direct ZEYOU, thence...

...cross ZEYOU at or above MEA/MCA for route of flight.

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026

TAKEOFF OBSTACLE NOTES:

Rwy 6L: Light poles 9′ from DER, 54′ left of centerline, 2′ AGL/584′ MSL.
Light poles, sign beginning 9′ from DER, 55′ right of centerline, up to 2′ AGL/584′ MSL.
Tree 842′ from DER, 720′ right of centerline, 622′ MSL.
Pole 964′ from DER, 235′ left of centerline, 24′ AGL/618′ MSL.
Crane 969′ from DER, 589′ right of centerline, 73′ AGL/641′ MSL.
Tree 2294′ from DER, 265′ right of centerline, 650′ MSL.
Transmission line tower, poles, trees beginning 2297′ from DER, 166′ right of centerline, up to 91′ AGL/675′ MSL.
Buildings, bridge beginning 2682′ from DER, 597′ right of centerline, up to 124′ AGL/704′ MSL.
Tower 1 NM from DER, 1347′ right of centerline, 150′ AGL/758′ MSL.

Rwy 6R: Sign, light poles beginning 27′ from DER, 89′ left of centerline, up to 4′ AGL/585′ MSL.
Light poles 41′ from DER, 89′ right of centerline, 3′ AGL/585′ MSL.
Wind indicator 175′ from DER, 242′ left of centerline, 11′ AGL/590′ MSL.
Pole 177′ from DER, 241′ left of centerline, 14′ AGL/594′ MSL.
Pole 471′ from DER, 612′ right of centerline, 37′ AGL/617′ MSL.
Poles, sign beginning 626′ from DER, 595′ right of centerline, up to 37′ AGL/618′ MSL.
Poles beginning 1009′ from DER, 569′ right of centerline, up to 56′ AGL/637′ MSL.
Pole, dome beginning 1874′ from DER, 568′ right of centerline, up to 70′ AGL/651′ MSL.
Pole 3098′ from DER, 1282′ right of centerline, 49′ AGL/661′ MSL.
Pole 3372′ from DER, 1289′ right of centerline, 88′ AGL/708′ MSL.
Transmission line towers, pole, building beginning 3720′ from DER, 96′ right of centerline, up to 93′ AGL/714′ MSL.
Tower, poles, building beginning 4310′ from DER, 170′ right of centerline, up to 106′ AGL/737′ MSL.
Antenna, towers beginning 1.2 NM from DER, 1827′ right of centerline, up to 227′ AGL/849′ MSL.

Rwy 24L: Light poles 10′ from DER, 29′ left of centerline, 2′ AGL/582′ MSL.
Light poles 10′ from DER, 29′ right of centerline, 2′ AGL/582′ MSL.
Fence 184′ from DER, 451′ left of centerline, 9′ AGL/590′ MSL.
Building 197′ from DER, 502′ left of centerline, 27′ AGL/610′ MSL.
Building, tank beginning 213′ from DER, 411′ left of centerline, up to 30′ AGL/613′ MSL.
Pole 900′ from DER, 621′ left of centerline, 60′ AGL/628′ MSL.
Crane, poles, vessels on water, building beginning 1038′ from DER, 38′ left of centerline, up to 85′ AGL/653′ MSL.
Pole 1319′ from DER, 161′ right of centerline, 64′ AGL/632′ MSL.
Building 1725′ from DER, 686′ left of centerline, 165′ AGL/743′ MSL.
Buildings, bridge, dome, pole, vessels on water beginning 1748′ from DER, 196′ left of centerline, up to 167′ AGL/745′ MSL.
Vessel on water 2146′ from DER, 90′ right of centerline, 65′ AGL/637′ MSL.
Windmills beginning 2340′ from DER, 1119′ left of centerline, up to 152′ AGL/750′ MSL.
Stadium, cranes beginning 2821′ from DER, 317′ left of centerline, up to 176′ AGL/763′ MSL.
Building, vessels on water, crane, elevator, bridge, vehicle on road beginning 5056′ from DER, 207′ left of centerline, up to 275′ AGL/896′ MSL.

Rwy 24R: Light poles 10′ from DER, 55′ right of centerline, 2′ AGL/582′ MSL.
Light poles, sign beginning 10′ from DER, 55′ left of centerline, up to 2′ AGL/582′ MSL.
Poles, vessels on water beginning 1514′ from DER, 338′ left of centerline, up to 64′ AGL/632′ MSL.
Bridge beginning 2106′ from DER, 695′ left of centerline, up to 70′ AGL/648′ MSL.
Pole, vessels on water beginning 2324′ from DER, 866′ left of centerline, up to 86′ AGL/654′ MSL.
Stadium, cranes beginning 3015′ from DER, 816′ left of centerline, up to 176′ AGL/763′ MSL.
Crane 5727′ from DER, 1699′ right of centerline, 152′ AGL/731′ MSL.

EC-2, 29 OCT 2026 to 26 NOV 2026