

APP CRS	Rwy Idg	9320
180°	TDZE	295
	Apt Elev	341

RNAV (RNP) X RWY 18R

MEMPHIS INTL (MEM)

T For uncompensated Baro-VNAV systems, procedure NA below -9°C (16°F) or above 48°C (118°F). Simultaneous approach authorized. GPS required. Missed approach requires RNP less than 1.0. Use of FD or AP required during simultaneous operations.

MALSR



MISSED APPROACH: Climb to 5000 on track 180° to ZUPIN and on track 180° to HARUB and on track 180° to JAGUR and on track 223° to JEPOB and hold.

MEMPHIS APP CON

119.1	291.6	(176°-355°)
125.8	338.3	(356°-175°)

MEMPHIS TOWER		
(Rwy 9-27)	118.3	257.8
(Rwys 18C-36C, 18L-36R)	119.7	257.8
(Rwy 18R-36L)	128.425	257.8


	GND CON		
(Rwy 9-27)		121.0	379.2
(Rwys 18C-36C, 18L-36R)		121.9	379.2
(Rwy 18R-36L)		121.65	379.2

D-ATIS
127.75





CLNC DEL
125.2

CPDLC

RADAR REQUIRED



ELEV	341		TDZE	295
------	-----	---	------	-----

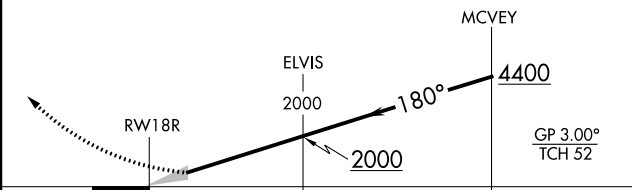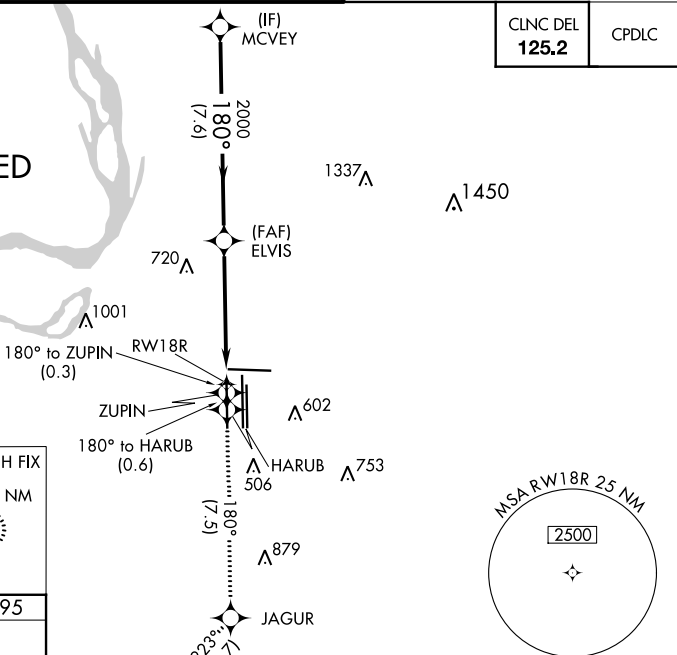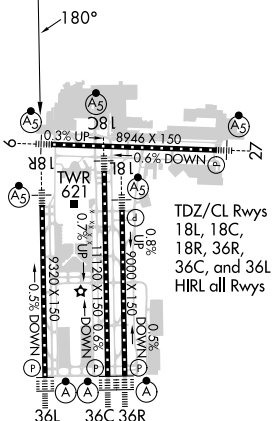

CATEGORY	A	B	C	D
RNP 0.14 DA	737/45 442 (400-7/8)			

AUTHORIZATION REQUIRED