

ATQASUK EDWARD BURNELL SR MEML (ATK)(PATQ) 1 S UTC-9(-8DT) N70°28.03'
W157°26.14'

CAPE LISBURNE
H-1A, L-4I
IAP

101 B NOTAM FILE ATK

RWY 07-25: 4370X90 (GRVL) MIRL

RWY 07: REIL. PAPI(P2L)—GA 3.0° TCH 30'.

RWY 25: REIL. PAPI(P2L)—GA 3.0° TCH 30'.

SERVICE: LGT ACTVT REIL Rwy 07 and 25; PAPI Rwy 07 and 25; MIRL Rwy 07-25—CTAF.

AIRPORT REMARKS: Unattended. Abnd rwy vsb N side of community. Rwy 25, 6 in ruts 1800 ft fm thr. Rwy cond unmr, rcmd visual insp prior to use. Rwy surface 90-110 ft btn lgts.

AIRPORT MANAGER: 907-852-0489

WEATHER DATA SOURCES: AWOS-3P 119.925 (907) 633-2012.

COMMUNICATIONS: CTAF 122.9


Ⓡ **ANCHORAGE CENTER APP/DEP CON** 135.3

RADIO AIDS TO NAVIGATION: NOTAM FILE BRW.

BARROW (H) (H) VORW/DME 116.2 BRW Chan 109 N71°16.41'

W156°47.29' 185° 50.2 NM to fld, 57/10E.

COMM/NAV/WEATHER REMARKS: Barrow FSS 1-800-779-7709. For a toll free call to Fairbanks FSS dial 1-866-248-6516.

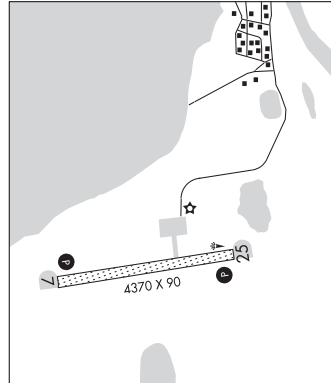

BADAMI (See DEADHORSE on page 91)

BARANOF WARM SPRINGS FLOAT AND SEAPLANE FLOAT SPB (BNF) 0 SE UTC-9(-8DT) N57°05.33' JUNEAU

W134°49.99'

00 NOTAM FILE SIT

WATERWAY E-W: 10000X1000 (WATER)

SEAPLANE REMARKS: Unattended. Dock. High terrain surrounding landing zone. Occasional turbulent wind and wind shear at low elevation. Opr area in Warm Springs Bay. Strong current from waterfall shoves planes into vessel float, very dangerous at certain tides. Boats may be tied to SPB dock/float ramp.

AIRPORT MANAGER: (907) 747-3439

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE SIT.


MOUNT EDGE CUMBE NDB (MHW) 414 IME N57°02.84'

W135°21.95' 062° 17.6 NM to fld, 19/20E.

NDB unusable:

320°-140° byd 15 NM blo 6,000'

COMM/NAV/WEATHER REMARKS: For a toll free call to Sitka FSS call 1-907-478-6300. For a toll free call to Juneau FSS dial 1-800-WX-BRIEF.

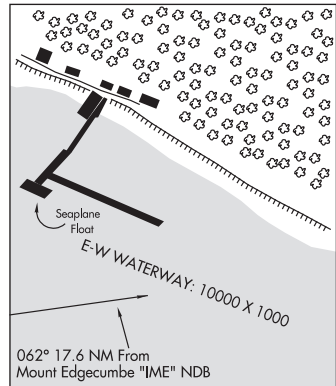

BARROW N71°16.41' W156°47.29' NOTAM FILE BRW.

POINT BARROW
H-1A, L-4I

(H) (H) VORW/DME 116.2 BRW Chan 109 57/10E.

RCO 122.2 122.6 123.6 (FAIRBANKS RADIO)