



|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Idg  | 6800 |
| 072°    | TDZE     | 1175 |
|         | Apt Elev | 1175 |

RNAV (GPS) Y RWY 6

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (R.O.A)

|                                                                                                                                                                                                                                                                                              |                                              |                                                                                                                                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| RNP APCH.                                                                                                                                                                                                                                                                                    | MALSR                                        | MISSED APPROACH: Climbing right turn to 4000 direct DEWET and hold.<br>** Missed approach requires minimum climb of 276 feet per NM to 2700. |
| <div><div><div></div><div></div><div></div></div><div><div>Circling NA northwest of Rwy 6-24. For inop ALS, increase LNAV** Cat A and B visibility to 1 SM, LNAV Cat A visibility to 1 SM, and LNAV Cat C and D visibility to 2½ SM.</div><div><div></div><div>-13°C</div></div></div></div> | <div><div></div><div></div><div></div></div> |                                                                                                                                              |

|         |                 |               |             |          |
|---------|-----------------|---------------|-------------|----------|
| ATIS    | ROANOKE APP CON | ROANOKE TOWER | GND CON     | CLNC DEL |
| 132.375 | 126.9 339.8     | 118.3 257.8   | 121.9 257.8 | 119.7    |

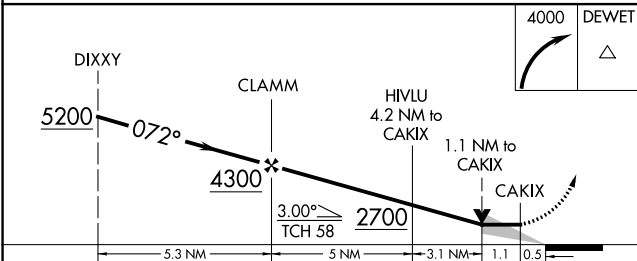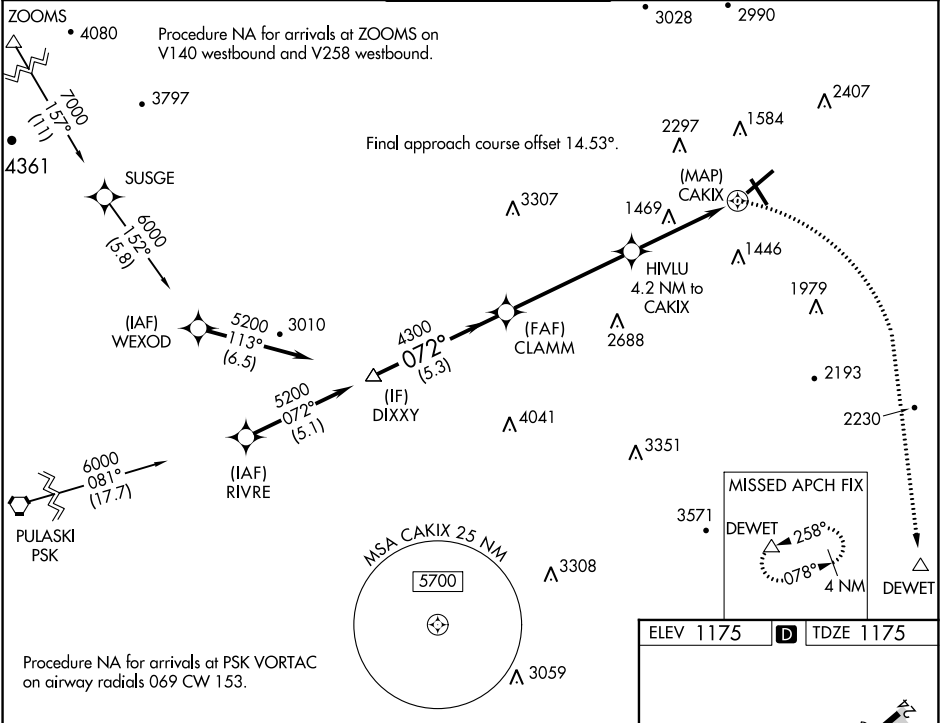

| CATEGORY   | A                     | B                       | C                       | D                       |
|------------|-----------------------|-------------------------|-------------------------|-------------------------|
| LNAV MDA** | 1720-¾                | 545 (600-¾)             | 1720-1⅛                 | 545 (600-1⅛)            |
| LNAV MDA   | 1980-¾                | 805 (900-¾)             | 1980-1⅞                 | 805 (900-1⅞)            |
| CIRCLING   | 1980-1<br>805 (900-1) | 1980-1¼<br>805 (900-1¼) | 2420-3<br>1245 (1300-3) | 2820-3<br>1645 (1700-3) |

