

LOC I-SLN	APP CRS	Rwy Idg	12300
108.9	353°	TDZE	1271
		Apt Elev	1288


ILS or LOC RWY 35
SALINA RGNL (SLN)

⚠ For inop ALS, increase S-LOC 35 Cat D visibility to 1 1/2 SM and Cat E visibility to 1 1/2 SM. For inop ALS, increase S-ILS 35 Cat E visibility to 3/4 SM. Circling NA for Cats D and E southwest of Rwy 12-30.


MALSR

MISSED APPROACH: Climb to 1700 then climb to 3000 direct SLN VORTAC and hold.

ATIS	KANSAS CITY CENTER	SALINA TOWER ★	GND CON	UNICOM
120.15	134.9 363.2	119.3 (CTAF) 0 257.7	121.9 360.8	122.95

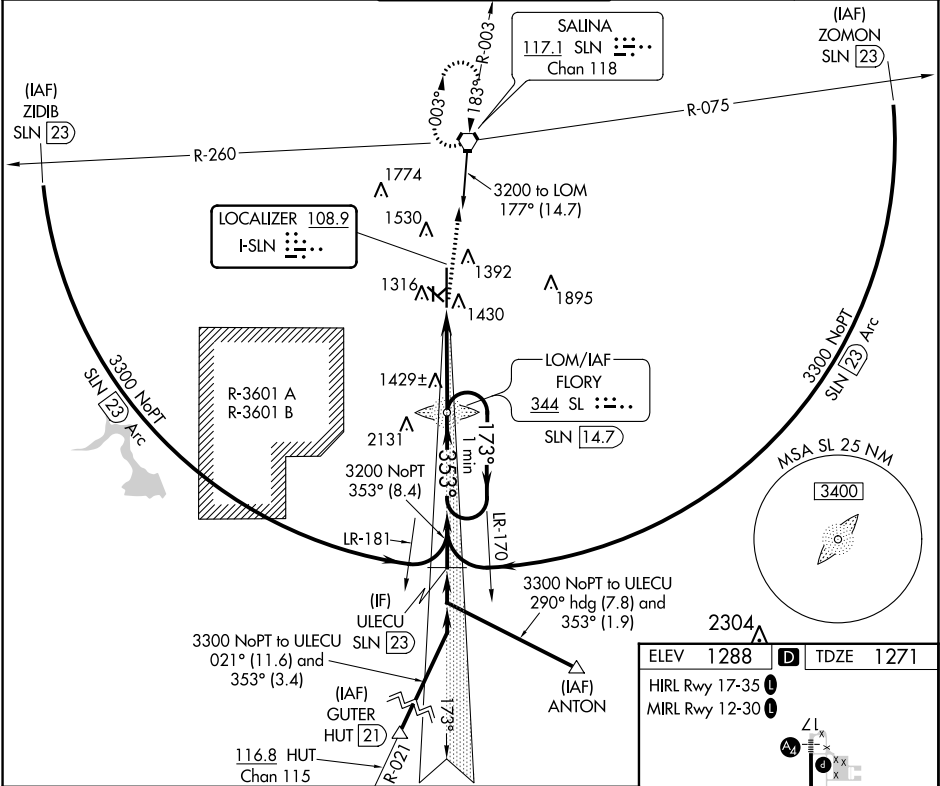

1700	3000	SLN	SL LOM SLN 14.7 One Minute Holding Pattern 3166 173° → ← 353° 3200 GS 3.00° TCH 48 5.7 NM			
CATEGORY	A	B	C	D	E	
S-ILS 35	1471-½ 200 (200-½)					
S-LOC 35	1680-½ 409 (400-½)					
CIRCLING	1820-1 532 (600-1)	1840-1 552 (600-1)	1860-1½ 572 (600-1½)	1860-2 572 (600-2)	1920-2¼ 632 (700-2¼)	

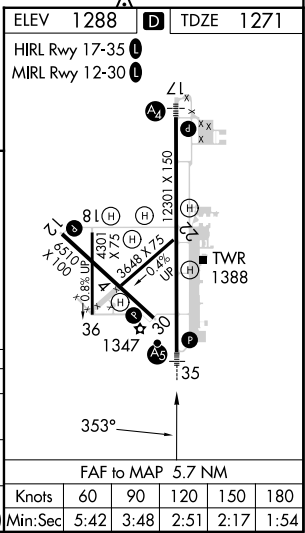

SALINA RGNL (SLN)
ILS or LOC RWY 35

NC-2, 21 MAR 2024 to 18 APR 2024

NC-2, 21 MAR 2024 to 18 APR 2024