

WAAS CH 58006 W12A	APP CRS 121°	Rwy Idg 7504 TDZE 402 Apt Elev 410
--	------------------------	---


RNAV (GPS) Y RWY 12

TRI-CITIES (PSC)


⚠ Baro-VNAV NA when using Hermiston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Hermiston altimeter setting. When local altimeter setting not received, use Hermiston altimeter setting: increase all DA 95 feet and all MDA 100 feet. Increase LPV all Cats visibilities ½ mile; LNAV/VNAV all Cats visibilities ⅓ mile; increase LNAV and Circling Cats C and D visibility ¼ mile.

MISSED APPROACH:
Climb to 900 then climbing left turn to 3200 direct CITYS and hold.

ATIS 125.65	SPOKANE APP CON ★ 128.75 377.2	TRI-CITIES TOWER ★ 135.3 (CTAF) 0 323.3	GND CON 121.8	CLNC DEL 120.0	UNICOM 122.95
-----------------------	--	---	-------------------------	--------------------------	-------------------------

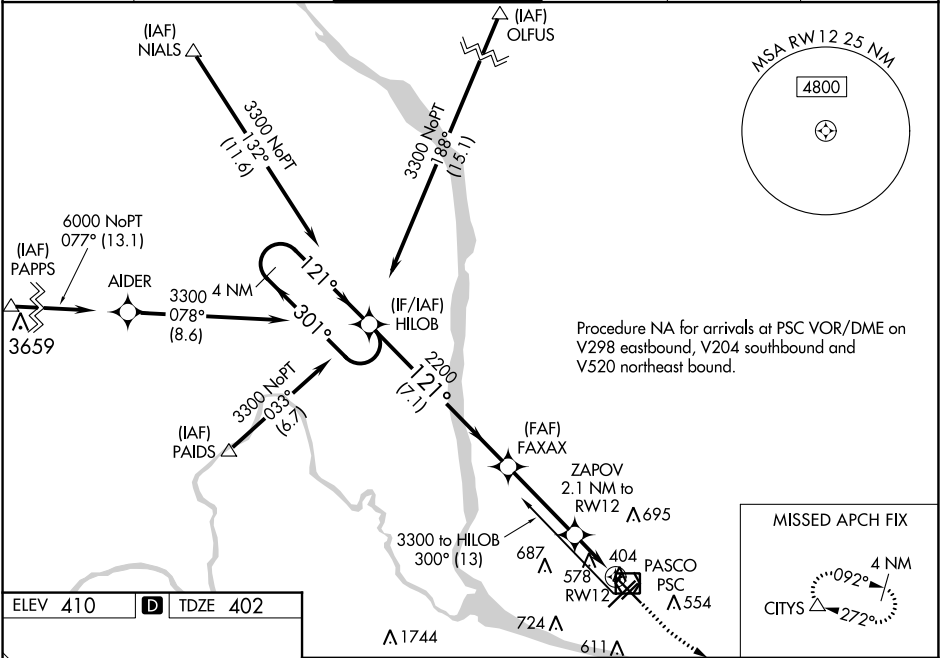

ELEV 410	D	TDZE 402
----------	----------	----------

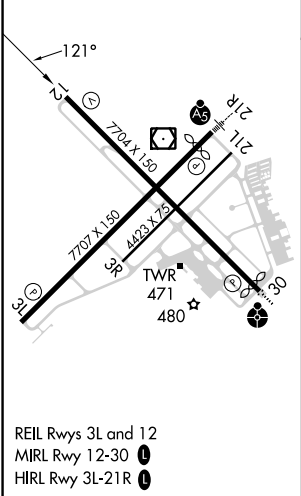

4 NM Holding Pattern HILOB 3300 ← 301° 121° → GP 3.00° TCH 54 FAXAX 2200 ZAPOV 2.1 NM to RW12 *1.2 NM to RW12 *LNNAV only 7.1 NM 3.4 NM 0.9 NM 1.2 NM RW12					
CATEGORY	A		B	C	D
LPV DA	602- ³ / ₄ 200 (200- ³ / ₄)				
LNAV/VNAV DA	755-1 ¹ / ₈ 353 (400-1 ¹ / ₈)				
LNAV MDA	840-1 438 (500-1)		840-1 ³ / ₈ 438 (500-1 ³ / ₈)		
CIRCLING	880-1 470 (500-1)	940-1 530 (600-1)	1040-1 ³ / ₄ 630 (700-1 ³ / ₄)	1100-2 ¹ / ₄ 690 (700-2 ¹ / ₄)	

NW-1, 21 MAR 2024 to 18 APR 2024

NW-1, 21 MAR 2024 to 18 APR 2024