

WAAS
CH **86727**
W21A

APP CRS
210°

Rwy Idg
TDZE
Apt Elev

6780
857
859

RNAV (GPS) RWY 21

MID-OHIO VALLEY RGNL (PKB)

RNP APCH.


▼

Baro-VNAV and VDP NA when using Athens/Albany altimeter setting. Rwy 21 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 38°C. When local altimeter setting not received, use Athens/Albany altimeter setting: increase LPV DA to 1249 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1237 feet and visibility all Cats ½ SM; increase all MDAs 100 feet and visibility Cat C/D ½ SM. Circling Rwy 10, 28 NA at night.

⚠

MISSED APPROACH:
Climb to 3000 direct
UNSAW and hold.

ATIS 124.35	INDIANAPOLIS CENTER 125.55 317.475	PARKERSBURG TOWER ★ 123.7 (CTAF) 0 257.8	GND CON 126.45	UNICOM 122.95
-----------------------	--	--	--------------------------	-------------------------

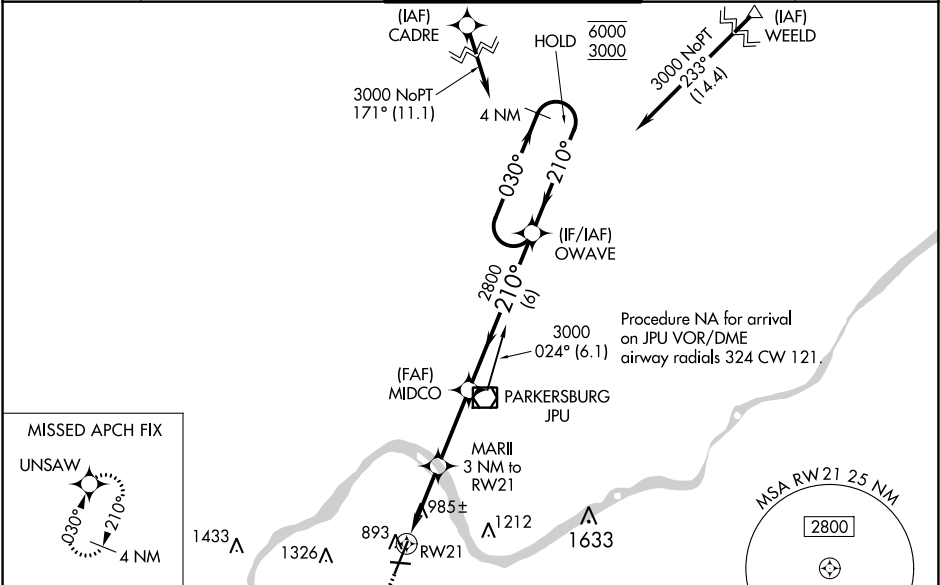

ELEV 859

D

TDZE 857

210°

7240 X 1.50

TWR 918

4002

X 1.50

28

10

3

10.8% UP

AS

REIL Rwy 28

REIL Rwy 10, 21

HIRL Rws 3-21 and 10-28

3000

UNSAW

MARII 3 NM to RW21

MIDCO 2800

OWAVE

4 NM Holding Pattern

030° → 6000

← 210° 3000

GP 3.00°

TCH 56

*1860

*1 NM to RW21

2800

210°

2.9 NM

6 NM

CATEGORY	A	B	C	D
LPV DA	1149-7⁄8	292 (300-7⁄8)		
LNAV/VNAV DA	1137-7⁄8	280 (300-7⁄8)		
LNAV MDA	1240-1	383 (400-1)	1240-1½	383 (400-1½)
CIRCLING	1320-1 461 (500-1)	1380-1 521 (600-1)	1640-2¼ 781 (800-2¼)	1640-2½ 781 (800-2½)