

RNAV (GPS) RWY 22
ATLANTIC CITY INTL (ACY)

ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). Rwy 22 helicopter visibility reduction below $\frac{3}{4}$ SM NA.



MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct TUBER and hold.

ATIS	ATLANTIC CITY APP CON	ATLANTIC CITY TOWER	GND CON	CLNC DEL
125.725 316.15	124.6 327.125	120.3 239.0	121.9 284.6	127.85 353.775


RADAR REQUIRED
WHEN R-5002B
IS ACTIVE.

CEDAR LAKE VCN 


Procedure NA for arrival on VCN VORTAC
airway radials 066 CW 160.

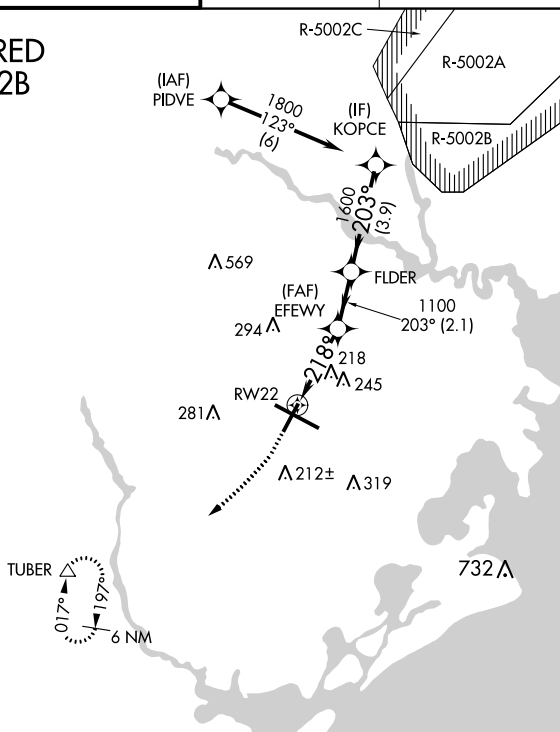

ELEV 75	D	TDZE 68
---------	----------	---------



TDZ/CL Rwy 13
HIRL Rwy 4-22 and 13-31
REIL Rwy 31

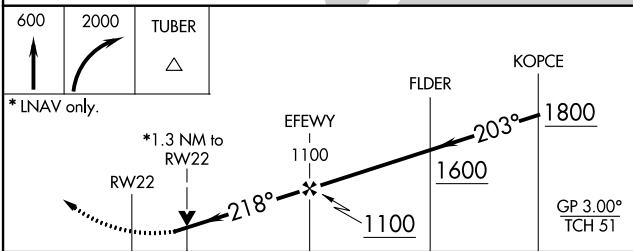

	1.3 NM	1.8 NM	2.1 NM	3.9 NM	
CATEGORY	A	B	C	D	E
LPV DA	364-1 296 (300-1)				
LNAV/VNAV DA	356-7/8 288 (300-7/8)				
LNAV MDA	520-1	452 (500-1)	520-1 1/8 452 (500-1 1/8)		
CIRCLING	540-1 465 (500-1)	600-1 525 (600-1)	620-1 1/2 545 (600-1 1/2)	640-2 565 (600-2)	760-2 1/2 685 (700-2 1/2)