

LOC/DME I-EAU <u>109.5</u> Chan 32	APP CRS 224°	Rwy Idg 7301 TDZE 913 Apt Elev 913
--	------------------------	---

ILS or LOC RWY 22
CHIPPEWA VALLEY RGNL (EAU)



From DRDAN and MENRD RNAV-1 GPS required.
DME or RADAR required.

MALSR
A5


MISSED APPROACH: Climb to 1600 then climbing right turn to 3500 on EAU VORTAC R-047 to IROKE/I-EAU LOC/DME 13.4 DME/RADAR and hold.

T For inop ALS increase S-LCC 22 Cat C and D visibility to $\frac{7}{8}$ SM. For inop ALS when using Rice Lake altimeter setting, increase S-ILS 22 all Cats visibility to 1 SM. When local altimeter setting not received, use Rice Lake altimeter setting and increase DA 110 feet and all MDA 120 feet, increase S-LCC 22 Cat C and D and Circling Cat C visibility $\frac{1}{4}$ SM. VDP NA when using Rice Lake altimeter setting.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER ★ 118.575 (CTAF) 0	GND CON 120.925	UNICOM 122.95
-----------------	-----------------------------------	--	--------------------	------------------

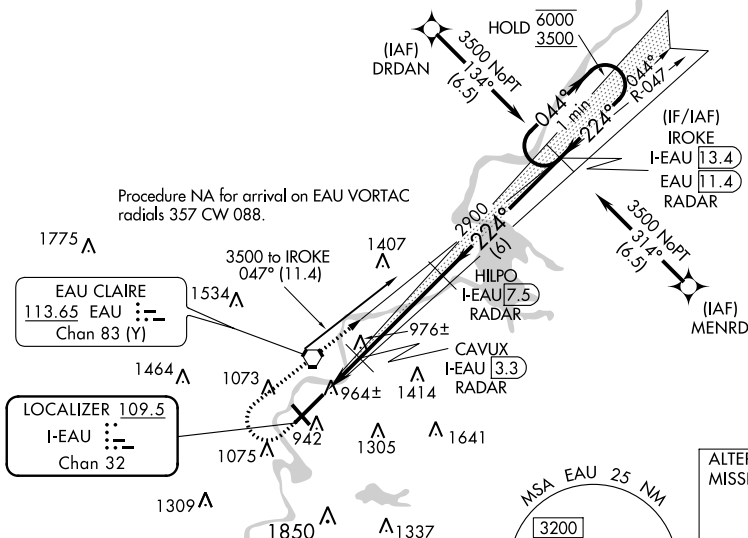

ALTERNATE
MISSED APCH FIX



FAF to MAP 6.1 NM					
Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

1600 ↑	3500 EAU R-047	IROKE I-EAU [13.4] RADAR	Use I-EAU DME when on the localizer course.		One Minute Holding Pattern
* LOC only			CAVUX I-EAU [3.3] RADAR	HILPO I-EAU [7.5] RADAR	IROKE I-EAU [13.4] RADAR
	I-EAU [1.4]			2900	
				224°	044° → ← 224°
			1560*	2900	6000 3500
					GS 3.00° TCH 50
	0.8	1.1 NM	4.2 NM	6 NM	
CATEGORY	A	B	C	D	
S-ILS 22		1113-½	200 (200-½)		
S-LOC 22		1220-½	307 (400-½)		
C CIRCLING	1480-1 567 (600-1)	1540-1 627 (700-1)	1660-2¼ 747 (800-2¼)	2200-3 1287 (1300-3)	