

WAAS CH 87006 W22A	APP CRS 224°	Rwy Idg TDZE Apt Elev	7301 913 913
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22
CHIPPEWA VALLEY RGNL (EAU)

RNP APCH.


Baro-VNAV and VDP NA when using Rice Lake altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Rice Lake altimeter setting and increase LPV DA to 1223, LNAV/VNAV DA to 1285, and increase LNAV/VNAV visibility all Cats ¼ SM; increase all MDA 120 feet and LNAV Cats C/D visibility ¾ SM and Circling Cat C visibility ¼ SM. For inop ALS increase LNAV/VNAV visibility all Cats to ¾ SM and LNAV Cats C/D visibility to 1 SM. For inop ALS when using Rice Lake altimeter setting increase LPV visibility all Cats to 1 SM and LNAV Cats C/D visibility to 1 ¾ SM.

MALS

AS

MISSED APPROACH:
Climb to 1320 then climbing right turn to 3500 direct IROKE and hold.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER ★ 118.575 (CTAF) 0	GND CON 120.925	UNICOM 122.95
------------------------	--	---	---------------------------	-------------------------

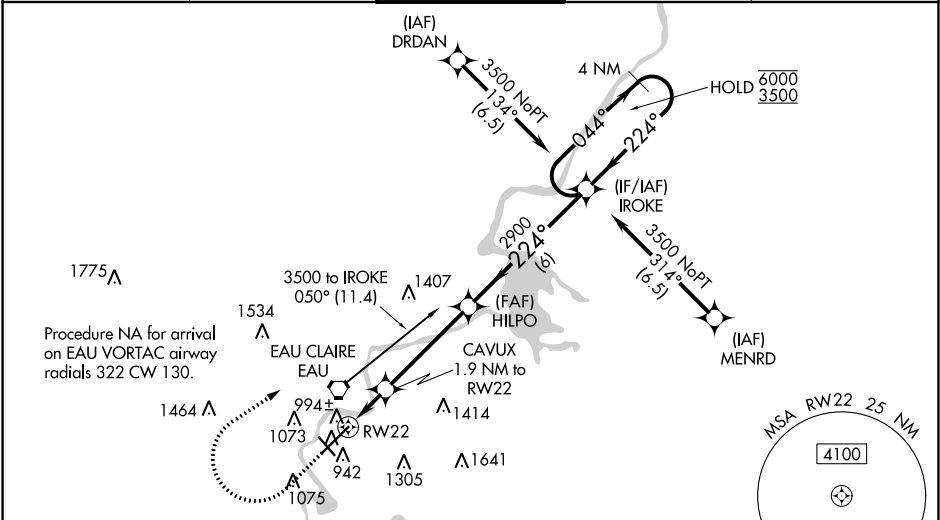

ELEV 913 D TDZE 913

224° to RW22

3000 X 100

TWR 968

8101 X 150

0.6% DOWN

941

HIRL Rwy 4-22

MIRL Rwy 14-32

REIL Rwy 4 and 14

▲ 1850 ▲ 1337		1320 ↑ 3500 ↗ IROKE ✦ HILPO 2900 IROKE 2900 CAVUX 1.9 NM to RW22 RW22 0.9 NM 1560 224° 044° 224° 6000 3500 GP 3.00° TCH 50 4 NM Holding Pattern				
↑ *LNAV only ↗ *0.9 NM to RW22 ↻ RW22		0.9 NM 1 NM 4.2 NM 6 NM				
CATEGORY		A		B	C	D
LPV	DA	1113-½		200 (200-½)		
LNAV/VNAV	DA	1175-½		262 (300-½)		
LNAV	MDA	1260-½	347 (400-½)	1260-⅝	347 (400-⅝)	
CIRCLING		1480-1 567 (600-1)	1540-1 627 (700-1)	1660-2¼ 747 (800-2¼)	2200-3 1287 (1300-3)	

EC-3, 21 MAR 2024 to 18 APR 2024

EC-3, 21 MAR 2024 to 18 APR 2024