


WAAS CH 69217 W04A	APP CRS 044°	Rwy Idg TDZE Apt Elev	7701 889 913
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4
CHIPPEWA VALLEY RGNL (EAU)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Rice Lake Rgnl/Carl's Fld altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rice Lake Rgnl/Carl's Fld altimeter setting and increase LPV DA to 1199, LNAV/VNAV DA to 1489 and all visibilities ½ SM. Increase all MDA 120 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM. Circling Rwy 32 NA at night.

MISSED APPROACH.
Climb to 3000 direct
IROKE and hold.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER* 118.575 (CTAF) 0	GND CON 120.925	UNICOM 122.95
-----------------	-----------------------------------	---------------------------------------	--------------------	------------------

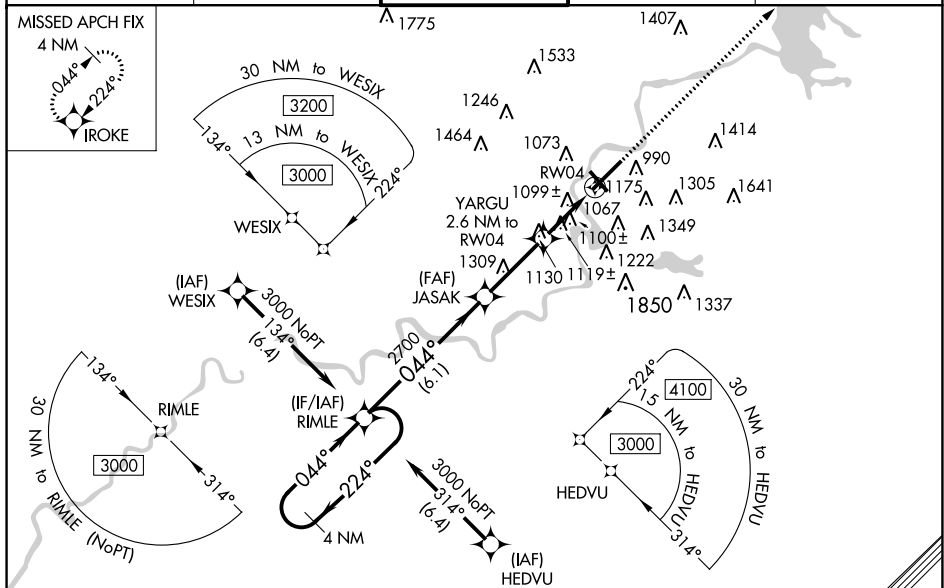

ELEV 913	D	TDZE 889
----------	----------	----------

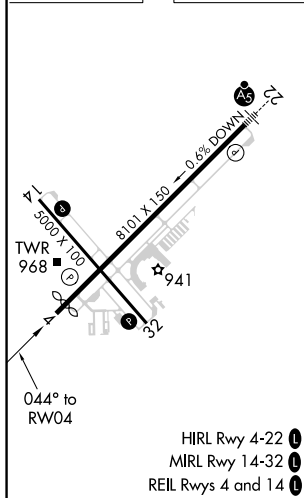

4 NM Holding Pattern

RIMLE

JASAK 2700

YARGU 2.6 NM to RW04

***1740**

***1.3 NM to RW04**

RW04

GP 3.00° TCH 44

FALLS 1 MOA

3000

224°

044°

044°

2700

6.1 NM

3 NM

1.3 NM

1.3 NM

***LNAV only**

CATEGORY	A	B	C	D
LPV DA	1089-3 $\frac{1}{4}$ 200 (200-3 $\frac{1}{4}$)			
LNAV/VNAV DA	1379-1 $\frac{5}{8}$ 490 (500-1 $\frac{5}{8}$)			
LNAV MDA	1360-1	471 (500-1)	1360-1 $\frac{3}{8}$	471 (500-1 $\frac{3}{8}$)
CIRCLING	1480-1 567 (600-1)	1540-1 627 (700-1)	1660-2 $\frac{1}{4}$ 747 (800-2 $\frac{1}{4}$)	2200-3 1287 (1300-3)