

WAAS CH 53636 W04A	APP CRS 038°	Rwy Idg 3700 TDZE 352 Apt Elev 354
--	------------------------	---

RNAV (GPS) RWY 4


WASILLA (IYS) (PAWS)

RNP APCH.

- T** Circling NA to Rwy 4S and 22S. Baro-VNAV and VDP NA when using Palmer
A altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA
below -20°C or above 54°C. When local altimeter setting not received, use Palmer
altimeter setting and increase all DA 46 feet, all MDA 60 feet and all visibilities ¼ mile.

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct BGG VORTAC and hold.

AWOS-3P 135.25	ANCHORAGE APP CON 119.1 363.2	CTAF 122.8 0
--------------------------	---	------------------------

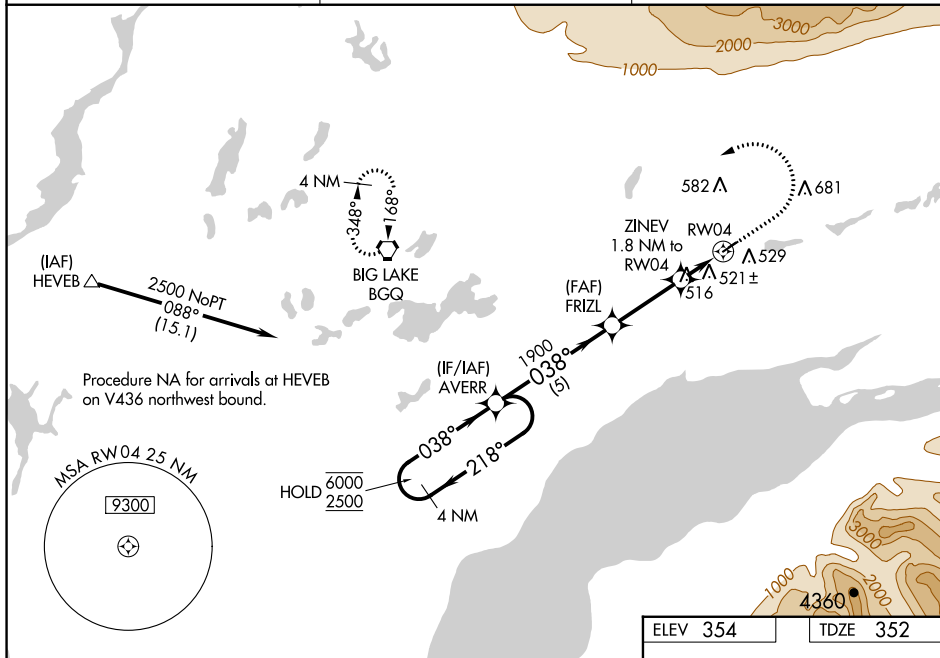

4 NM Holding Pattern

GP 3.00° TCH 45°

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).

1000 3000 BQ0

*LNAV only.

6000 ← 218°

2500 → 038°

038°

1900

1900

*960

5 NM

3 NM

0.5 NM

1.3 NM

ZINEV 1.8 NM to RW04

*1.3 NM to RW04

RW04

CATEGORY	A	B	C	D
LPV DA	602-3/4	250 (300-3/4)		NA
LNAV/VNAV DA	828-1 5/8	476 (500-1 5/8)		NA
LNAV MDA	780-1	428 (500-1)		NA
C CIRCLING	1000-1	646 (700-1)		NA

