

AMARILLO, TEXAS

HI-VOR or TACAN RWY 4

VORTAC PNH 116.6 Chan 113	APCH CRS 037°	Rwy Idg 13,502 TDZE 3607 Arpt Elev 3607
---	-------------------------	--

[USAF]

RICK HUSBAND AMARILLO INTL (KAMA)

DME required


T * When ALS inop, increase CAT D vis to 1¼ miles;
CAT E vis to 1½ miles.
** When ALS inop, increase CAT CD vis to 1½ miles;
CAT E vis to 1¾ miles.

MALSR
A5

MISSED APPROACH: Climbing right turn to 5000 on heading 090° and PNH VORTAC R-118 to CAUDE/PNH 13 DME and hold.


ATIS 118.85 350.3	AMARILLO APP CON 119.5 307.0	AMARILLO TOWER ★ 118.3 (CTAF) 0 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	ASR
----------------------	---------------------------------	--	------------------------	----------------------------	-----

When local altimeter setting not received,
use Borger altimeter setting. _____

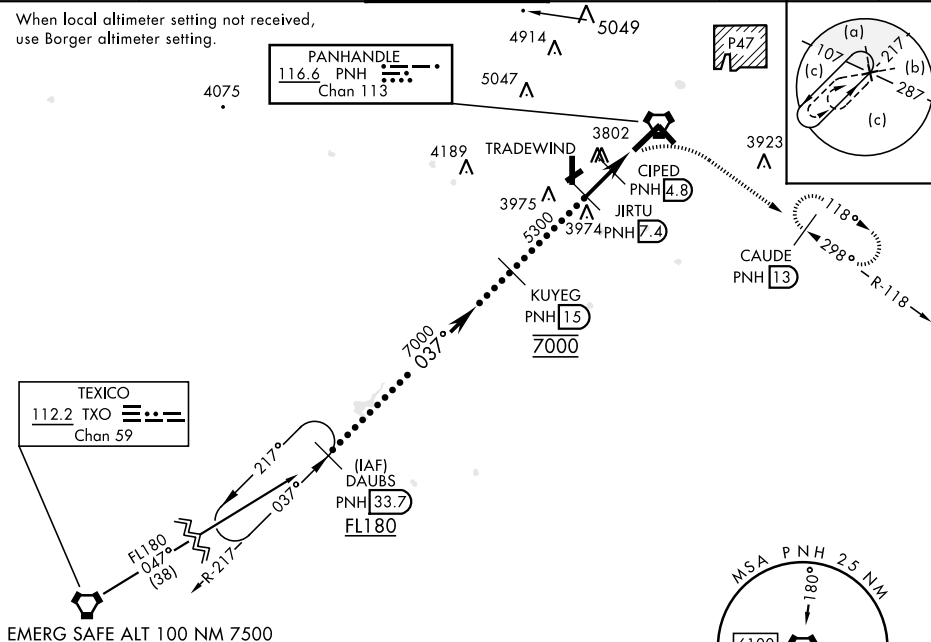


EMERG SAFE ALT 100 NM 7500

VDP N/A when using
BORGER altimeter setting.

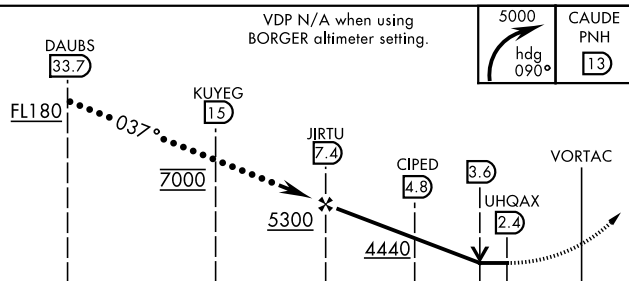

CATEGORY	C	D	E
S-4 *	4040/40 433 (500-34)	4040/50 433 (500-1)	
CIRCLING	4240-1¼ 633 (700-1¾)	4280-2¼ 673 (700-2¼)	4460-3 853 (900-3)
BORGER ALTIMETER SETTING			
S-4 **	4200-1¼	593	(600-1¼)
CIRCLING	4400-2¼ 793 (900-2¼)	4440-2¾ 833 (900-2¾)	4620-3 1013 (1100-3)

ELEV	3607	D	TDZE	3607
------	------	----------	------	------



HIRL all rwys **L**
REIL Rwy 13 **L**

AMARILLO, TEXAS

35°13'N-101°42'W

RICK HUSBAND AMARILLO INTL (KAMA)

Amdt 1A 05DEC19

HI-VOR or TACAN RWY 4

SC-2, 18 APR 2024 to 16 MAY 2024