

WAAS CH 62911 W30A	APP CRS 303°	Rwy Idg 10201 TDZE 1380 Apt Elev 1384
--	------------------------	--

RNAV (GPS) Y RWY 30C


PHOENIX-MESA GATEWAY (IWA)


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C (29°F) or above 35°C (95°F). DME/DME RNP- 0.3 NA. When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting and increase LPV DA to 1660 feet, LNAV/VNAV DA to 1710 feet and all MDA 80 feet; increase LPV all Cats visibility ¼ SM, increase LNAV/VNAV all Cats, LNAV Cats C, D and E, and Circling Cats D, E visibility ¼ SM. VDP and Baro-VNAV NA with Phoenix Sky Harbor Intl altimeter setting.

MISSED APPROACH:
Climb to 2800 then climbing left turn to 5000 direct GICGE and hold.

ATIS ★ 133.5 270.275	PHOENIX APP CON 124.9 353.8	GATEWAY TOWER ★ 120.6 (CTAF) 289.4	GND CON 128.25 275.8	CLNC DEL 135.05
--------------------------------	---------------------------------------	--	--------------------------------	---------------------------

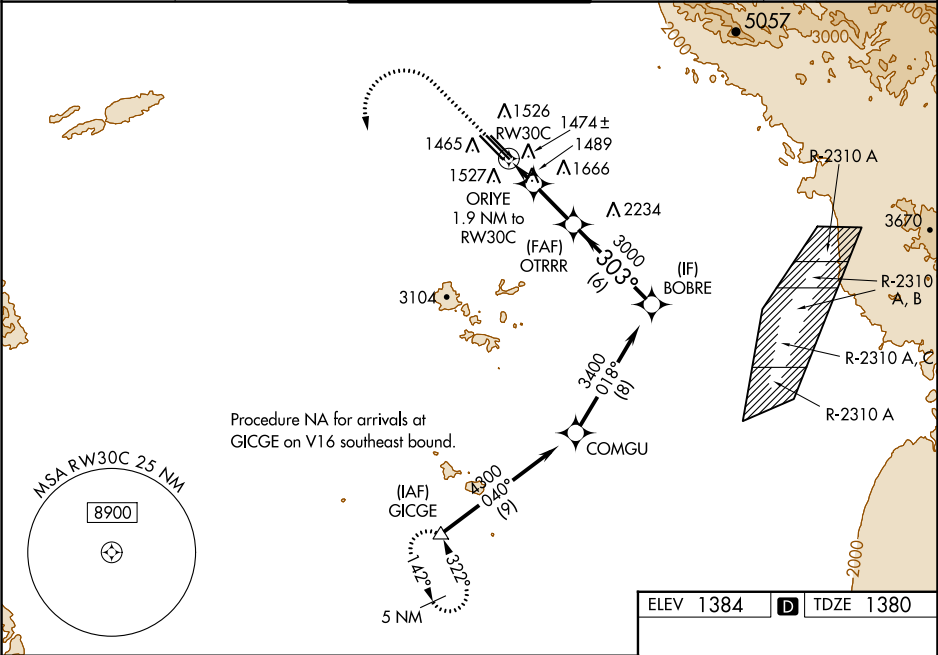

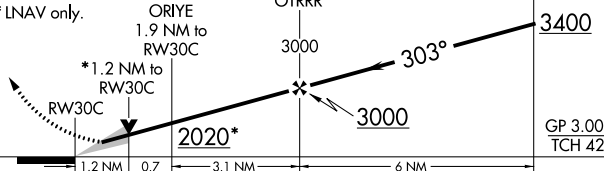2800	5000	GICGE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 49).				
							
* LNAV only.			ORIYE 1.9 NM to RW30C	OTRRR	BOBRE		
			* 1.2 NM to RW30C				
			1.2 NM	0.7	3.1 NM	6 NM	
CATEGORY			A	B	C	D	E
LPV DA			1580-¾ 200 (200-¾)				
LNAV/ VNAV DA			1630-⅞ 250 (300-⅞)				
LNAV MDA			1800-1 420 (500-1)	1800-1½ 420 (500-1½)			
CIRCLING			1880-1 496 (500-1)	1880-1½ 496 (500-1½)	2000-2 616 (700-2)	2040-2¼ 656 (700-2¼)	

ELEV 1384 TDZE 1380

1200-300 UP-1040 X 150

1200-300 UP-1020 X 150

1200-300 UP-9900 X 150

1200-300 DOWN-9900 X 150

1200-300 DOWN-9900 X 150

1200-300 DOWN-9900 X 150

TWR 1496

MIRL Rwy 12R-30L
HIRL Rwys 12L-30R and 12C-30C
REIL Rwys 12L and 30R