

APP CRS

172°

Rwy Idg

11022

TDZE

6177

Apt Elev

6187

RNAV (RNP) Z RWY 17R

CITY OF COLORADO SPRINGS MUNI (COS)


RNP AR APCH - GPS.

▼

For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 45°C. Simultaneous approach authorized.

MISSED APPROACH: Climb to 9000 on track 172° to KUSAC and on track 125° to JEMKI and on track 084° to DRAKE and hold.

ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6	GND CON 121.7 348.6	CLNC DEL 134.45 363.125
---------------------	----------------------------------	------------------------------	------------------------	----------------------------

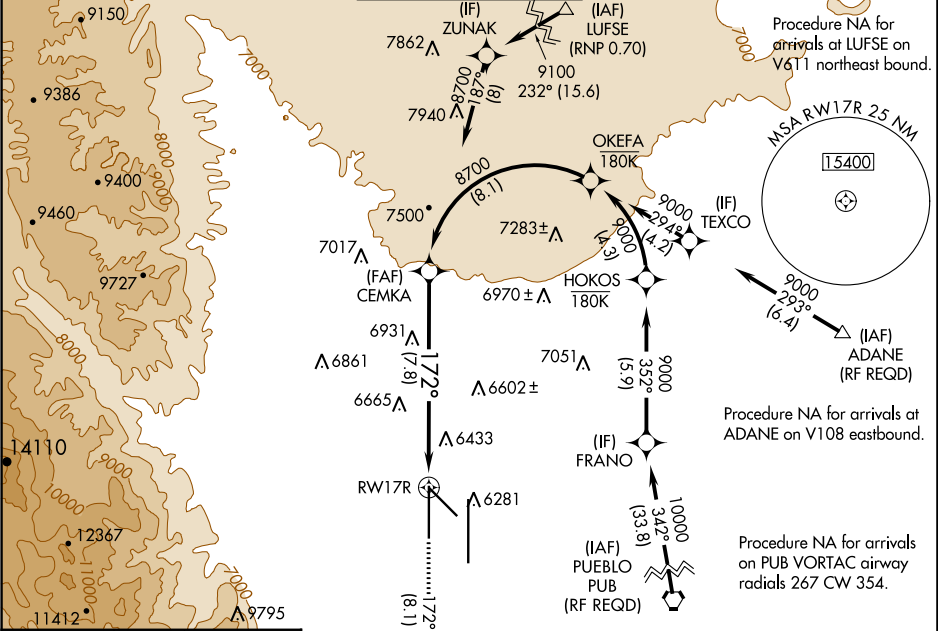

ELEV 6187

D

TDZE 6177

172°

17R

35L

35R

TWR 6340

11022 X 150

13500 X 150

0.5% UP

0.6% DOWN

0.6% UP

0.6% DOWN

MIRL Rwy 13-31

HIRL Rws 17R-35L and 17L-35R

REIL Rws 13, 17R, 31 and 35R

TDZ/CL Rws 17L and 35R

MISSED APCH FIX

DRAKE

JEMKI

(not to scale)

7 NM

9000

KUSAC

tr 125°

JEMKI

tr 084°

DRAKE

CEMKA

8700

GP 3.00°

TCH 55

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 49).

RW17R

172°

7.8 NM

See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.22 DA	6659-1½	482 (500-1½)		
RNP 0.30 DA	6902-2½	725 (800-2½)		

AUTHORIZATION REQUIRED