

|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>42827</b><br><b>W06A</b> | APP CRS<br><b>062°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>7401</b><br><b>944</b><br><b>955</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 6

ELMIRA/CORNING RGNL (ELM)

RNP APCH.

▼

⚠


❄ -22°C

Inop table does not apply to LNAV/VNAV all Cats. Circling Rwy 10 NA at night. Circling NA to Rwys 5 and 23. Circling NA for Cat D south of Rwys 10 and 28. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.  
# RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:  
Climb to 4000 direct  
IREKE and hold.

|                        |                                          |                                               |                         |                          |                         |
|------------------------|------------------------------------------|-----------------------------------------------|-------------------------|--------------------------|-------------------------|
| ATIS<br><b>125.475</b> | ELMIRA APP CON ★<br><b>128.425 257.8</b> | ELMIRA TOWER ★<br><b>121.1 (CTAF) 0 257.8</b> | GND CON<br><b>121.9</b> | CLNC DEL<br><b>121.9</b> | UNICOM<br><b>122.95</b> |
|------------------------|------------------------------------------|-----------------------------------------------|-------------------------|--------------------------|-------------------------|

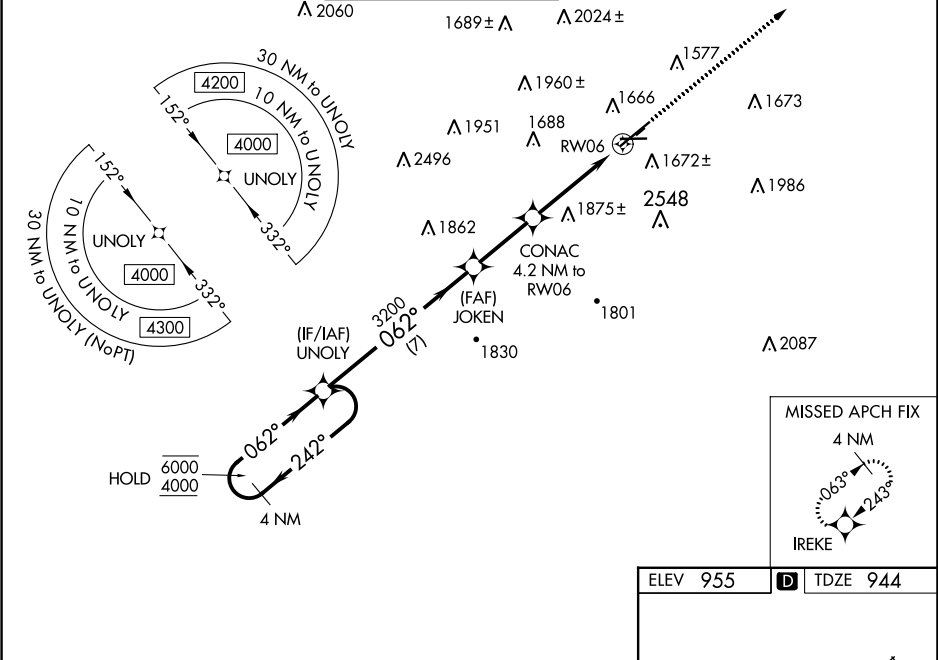

|                            |                           |                           |                         |                         |
|----------------------------|---------------------------|---------------------------|-------------------------|-------------------------|
| 4 NM Holding Pattern UNOLY |                           | JOKEN                     | CONAC 4.2 NM to RW06    | IREKE                   |
| 6000 ← 242°<br>4000 → 062° |                           | 3200                      | * 3 NM to RW06          | * INAV only             |
| GP 3.00°<br>TCH 52         |                           | * 2320                    | RW06                    |                         |
| 7 NM                       |                           | 2.8 NM                    | 1.2 NM                  | 3 NM                    |
| CATEGORY                   | A                         | B                         | C                       | D                       |
| LPV DA #                   | 1144/24                   |                           | 200 (200-½)             |                         |
| LNAV/VNAV DA               | 2138-5                    |                           | 1194 (1200-5)           |                         |
| LNAV MDA                   | 1940/40<br>996 (1000-¾)   | 1940/55<br>996 (1000-1)   | 1940-2½                 | 996 (1000-2½)           |
| CIRCLING                   | 2020-1¼<br>1065 (1100-1¼) | 2080-1½<br>1125 (1200-1½) | 2100-3<br>1145 (1200-3) | 2340-3<br>1385 (1400-3) |