


LOC I-FMY	APP CRS	Rwy Idg
110.7	051°	5548
		TDZE
		15
		Apt Elev
		17

ILS or LOC RWY 5

PAGE FLD (FMY)

ADF or RADAR required for procedure entry. ADF required for LOC only.		MISSED APPROACH: Climb to 1000 then climbing left turn to 2600 on RSW R-354 to SERFS INT/RSW 16.4 DME and hold.	
When Circling to Rwy 31 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. Rwy 5 helicopter visibility reduction below ¾ SM NA.			
ATIS	FORT MYERS APP CON ★	PAGE TOWER ★	GND CON
123.725	125.15 306.2 (Rwys 5, 13) 126.8 306.2 (Rwys 23, 31)	119.0 (CTAF) 0 306.95	121.7
			CLNC DEL
			121.7

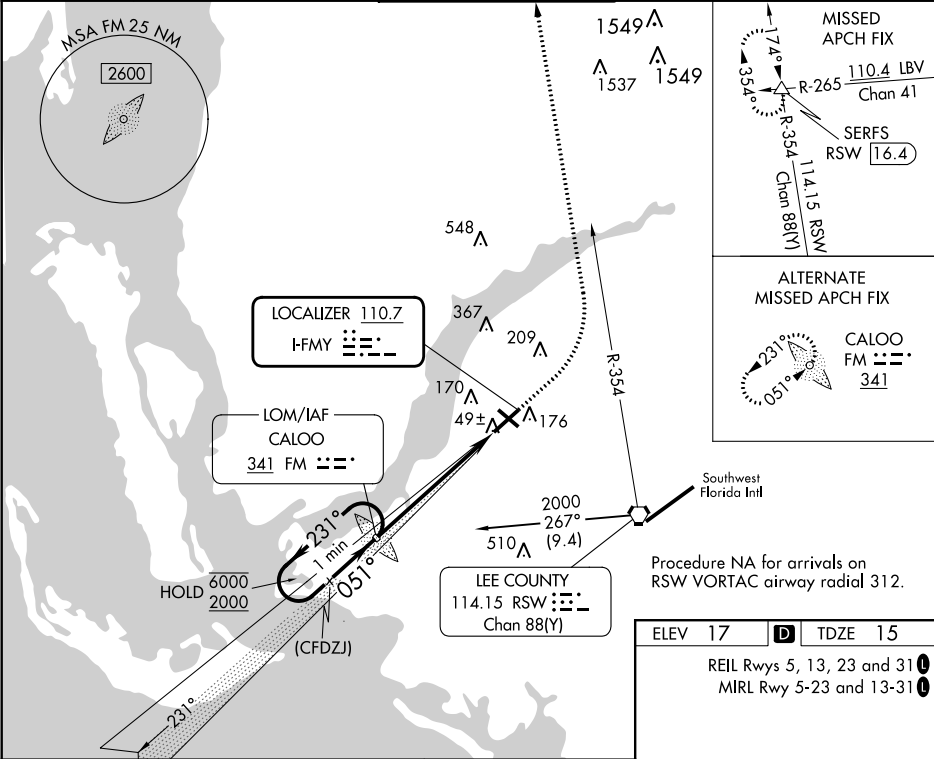

One Minute Holding Pattern		FM LOM	1000	2600	SERFS
6000 ← 231°		1967	↑	RSW R-354	△
2000 → 051°					
GS 3.00° TCH 53					
2000					
5.8 NM					
CATEGORY	A	B	C	D	
S-ILS 5	265-1		250 (300-1)		
S-LOC 5	460-1	445 (500-1)	460-1⅜	445 (500-1⅜)	
CIRCLING	540-1	523 (600-1)	600-1½ 583 (600-1½)	680-2 663 (700-2)	
FAF to MAP 5.8 NM					
Knots		60	90	120	150 180
Min:Sec		5:48	3:52	2:54	2:19 1:56