

WAAS CH 65738 W23A	APP CRS 236°	Rwy Idg 3035 TDZE 834 Apt Elev 836
--	------------------------	---

RNAV (GPS) RWY 23
SMITH FLD (SMD)


RNP APCH.




Procedure NA at night. Rwy 23 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all MDA 40 feet and LP and LNAV Cat C visibility $\frac{1}{8}$ SM.

MISSED APPROACH: Climb to 2700 direct JISUD and on track 294° to WERBU and hold.

AWOS-3 124.55	FORT WAYNE APP CON 127.2 284.6	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

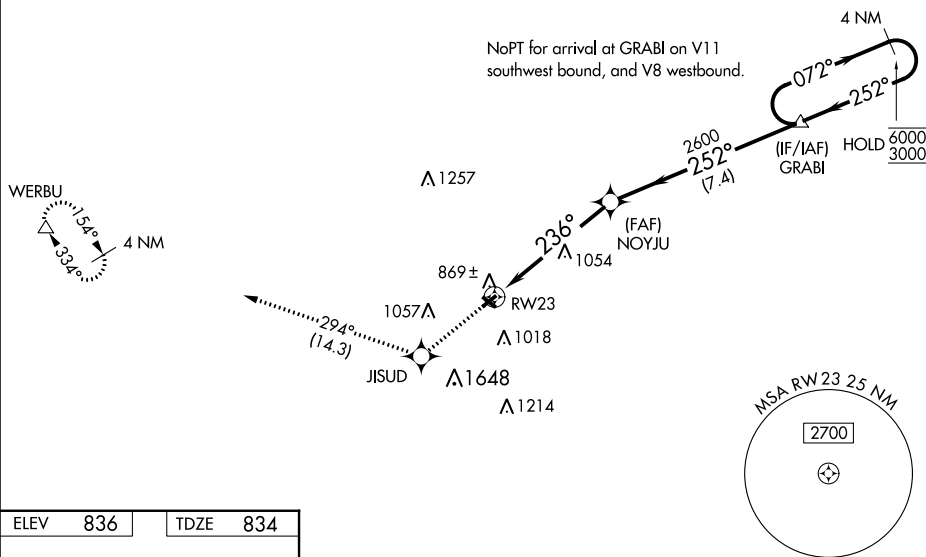

ELEV	836		TDZE	834
------	-----	--	------	-----



2700 ↑	JISUD ✱	tr 294°	WERBU △	Visual Segment - Obstacles.	4 NM Holding Pattern
-----------	------------	------------	------------	-----------------------------	-------------------------

CATEGORY	A	B	C	D
LP MDA	1360-1	526 (600-1)	1360-1½ 526 (600-1½)	NA
LNAV MDA	1400-1	566 (600-1)	1400-1⅝ 566 (600-1⅝)	NA
C CIRCLING	1400-1	564 (600-1)	1940-3 1104 (1200-3)	NA