

ILS or LOC RWY 5L  
INDIANAPOLIS INTL (IND)

ALSF-2

**MISSED APPROACH:** Climb to 1700 then climbing left turn to 3000 direct VHP VORTAC then on VHP VORTAC R-303 to KEADY/VHP 4.9 DME/RADAR and hold.

|                         |                                              |                                  |                         |                                 |       |
|-------------------------|----------------------------------------------|----------------------------------|-------------------------|---------------------------------|-------|
| D-ATIS<br><b>134.25</b> | INDIANAPOLIS APP CON<br><b>128.175 317.8</b> | INDY TOWER<br><b>120.9 257.8</b> | GND CON<br><b>121.9</b> | CLNC DEL<br><b>128.75 257.8</b> | CPDLC |
|-------------------------|----------------------------------------------|----------------------------------|-------------------------|---------------------------------|-------|


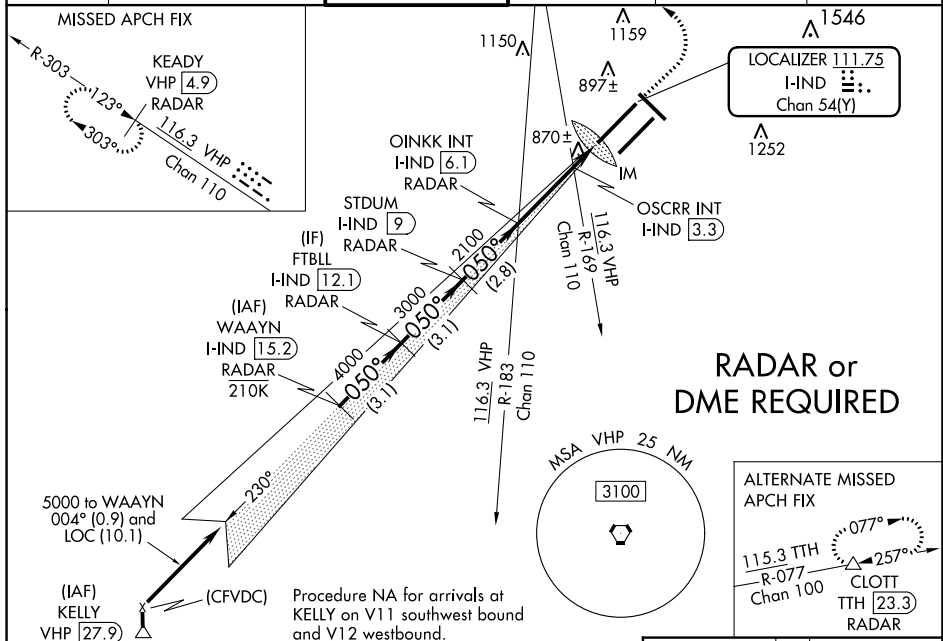


Diagram illustrating the VOR/DME station layout for WAAYN. The diagram shows a 5000-foot radius circle with a 050° bearing. Key points include FTBL (3.1 NM), STDM (3.1 NM), OINKK (2.8 NM), and OSCRR (2.8 NM). The diagram also shows the VOR and DME frequencies, and the station's location relative to the runway.

| CATEGORY                                                | A       | B           | C                       | D                       |
|---------------------------------------------------------|---------|-------------|-------------------------|-------------------------|
| S-ILS 5L                                                |         | 947/18      | 200 (200-½)             |                         |
| S-LOC 5L                                                | 1220/24 | 473 (500-½) | 1220/50                 | 473 (500-1)             |
| <b>C</b> CIRCLING                                       | 1420-1  | 624 (700-1) | 1420-1¾<br>624 (700-1¾) | 1560-2½<br>764 (800-2½) |
| OSCCR FIX MINIMUMS (DUAL VOR RECEIVERS or DME REQUIRED) |         |             |                         |                         |
| S-LOC 5L                                                | 1120/24 | 373 (400-½) | 1120/35                 | 373 (400-¾)             |
| <b>C</b> CIRCLING                                       | 1420-1  | 624 (700-1) | 1420-1¾<br>624 (700-1¾) | 1560-2½<br>764 (800-2½) |

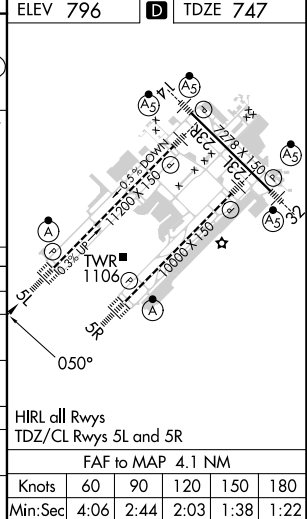

EC-2, 18 APR 2024 to 16 MAY 2024