
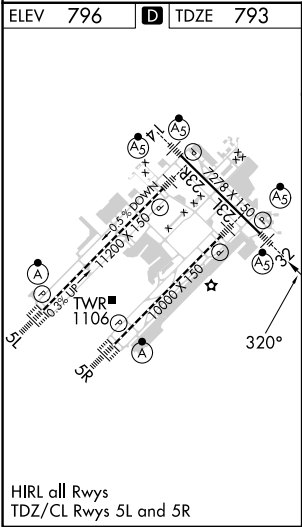


WAAS CH 62802 W32A	APP CRS 320°	Rwy Idg TDZE 793 Apt Elev 796
--	------------------------	---

RNAV (GPS) Y RWY 32

INDIANAPOLIS INTL (IND)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. **RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR		MISSED APPROACH: Climb to 3000 direct KEADY and hold.		
	D-ATIS 134.25	INDIANAPOLIS APP CON 128.175 317.8	INDY TOWER 120.9 257.8	GND CON 121.9	CLNC DEL 128.75 257.8

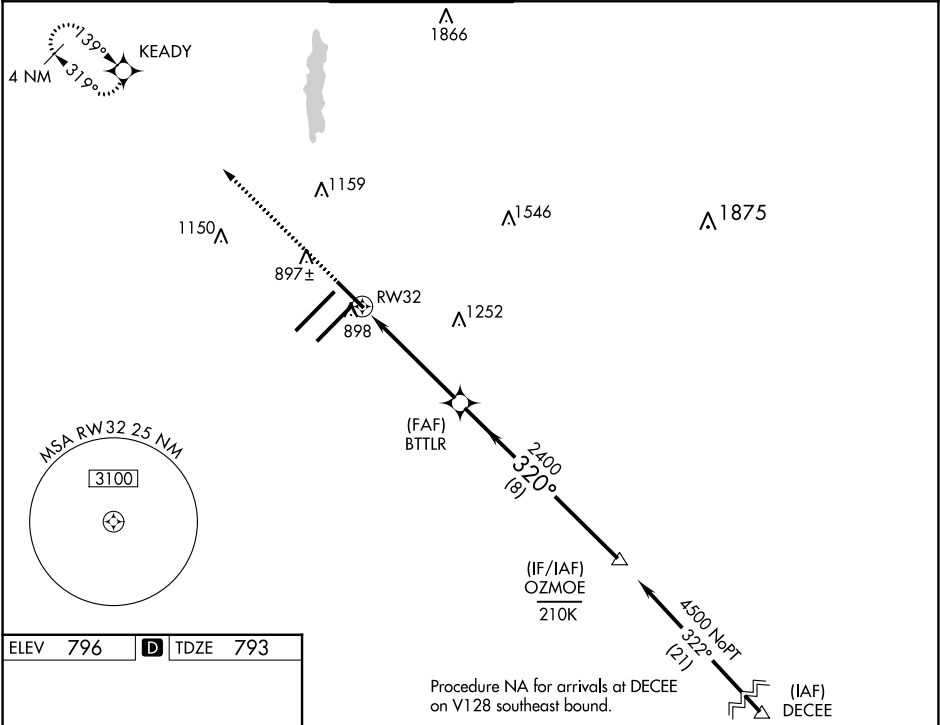

3000 ↑		KEYADY 		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).		OZMOE			
				BTTLR 2400		4500			
*LNAV only		*1 NM to RW32							
						GP 3.00° TCH 53			
CATEGORY		A		B		C		D	
LPV DA				** 993/24		200 (200-½)			
LNAV/ VNAV DA				1069/24		276 (300-½)			
LNAV MDA		1160/24 367 (400-½)		1160/35		367 (400-¾)			
C CIRCLING		1420-1 624 (700-1)		1420-1¾ 624 (700-1¾)		1560-2½ 764 (800-2½)			