

WAAS CH 72809 W18A	APP CRS 180°	Rwy Idg TDZE 653 Apt Elev 656
--	------------------------	---

RNAV (GPS) RWY 18



LA CROSSE RGNL (LSE')

RNP APCH.		LA CROSSE TOWER ★		GND CON	UNICOM
ATIS 124.95		MINNEAPOLIS CENTER 128.6 363.0		118.45 (CTAF) 251.075	121.8
UNICOM 122.95					

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27° C or above 54° C. When local altimeter setting not received, use Winona altimeter setting: increase LPV DA to 987 feet, LNAV/VNAV DA to 1257 feet and all MDA 60 feet. Increase LNAV/VNAV all Cats visibility ¼ SM and Circling Cat C visibility ¼ SM. For inoperative MALSR, increase LPV all Cats visibility ½ SM. LNAV minimums NA with Winona altimeter setting. Baro-VNAV and VDP NA when using Winona altimeter setting. Circling to Rwy 22 NA at night.

MALSR

MISSED APPROACH:
Climb to 3000 direct
PKRNA and hold.

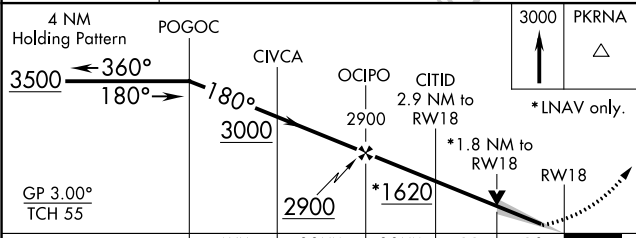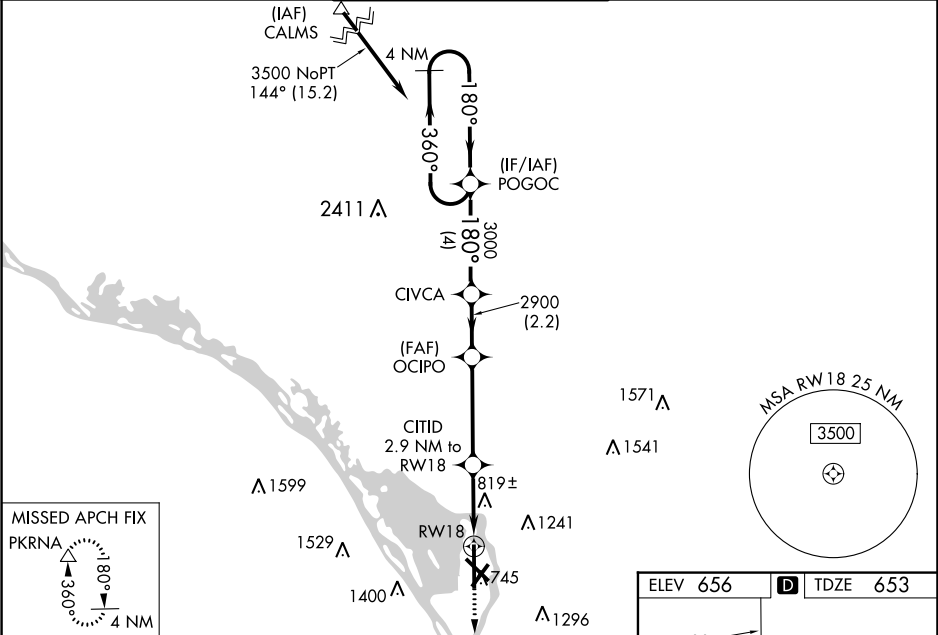

CATEGORY	A	B	C	D
LPV DA	925-½		272 (300-½)	
LNAV/VNAV DA	1204-½		551 (600-½)	
LNAV MDA	1360-½	707 (800-½)	1360-½	1360-¾
	704 (800-1)	804 (900-1)	707 (800-1½)	707 (800-¾)
CIRCLING	1360-1	1460-1	1760-3	1820-3
	704 (800-1)	804 (900-1)	1104 (1200-3)	1164 (1200-3)

