

LOC I-MEI <u>110.1</u>	APP CRS 011°	Rwy Idg 9013 TDZE 289 Apt Elev 298
----------------------------------	------------------------	---

ILS or LOC RWY 1
KEY FLD (MEI)

RNAV 1- GPS or DME required for procedure entry.


V Circling NA southst of Rwy's 1 and 22. When local altimeter not received, use Hattiesburg/Laurel Rgnl altimeter setting and increase all DA 138 feet and all MDA 140 feet. **A** S-ILS 1 all Cats visibility to RVR 3500, S-LOC 1 Cat B visibility to RVR 4000, Cat C, D, and E visibility ¾ mile, and Circling Cats B and D visibility ¼ mile, Cat C visibility ½ mile; increase ZUOFG Fix minimums S-LOC 1 Cats C, D, and E to RVR 6000, and Circling Cat C visibility ½ mile, Cat D and E visibility ¼ mile. For inop MALSR when using Hattiesburg/Laurel Rgnl altimeter setting, increase S-ILS 1 all Cats visibility to RVR 6000 and S-LOC 1 Cat E visibility to 1 ½ mile; increase ZUOFG Fix minimums S-LOC 1 Cat E visibility to 2 miles. Circling Rwy 22 NA at night. ** RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Hattiesburg/Laurel Rgnl altimeter setting).

MALSR



MISSED APPROACH:
Climb to 1100 then
climbing left turn
to 3000 on MEI
VORTAC R-216 to
PAULD INT/MEI 13.3
DME and hold.

ATIS	MERIDIAN APP CON ★	KEY TOWER ★	GND CON	CLNC DEL	UNICOM
126.475 291.675	120.5 269.325	133.975 (CTAF) 0 257.8	121.9 348.6	121.9 348.6	122.95

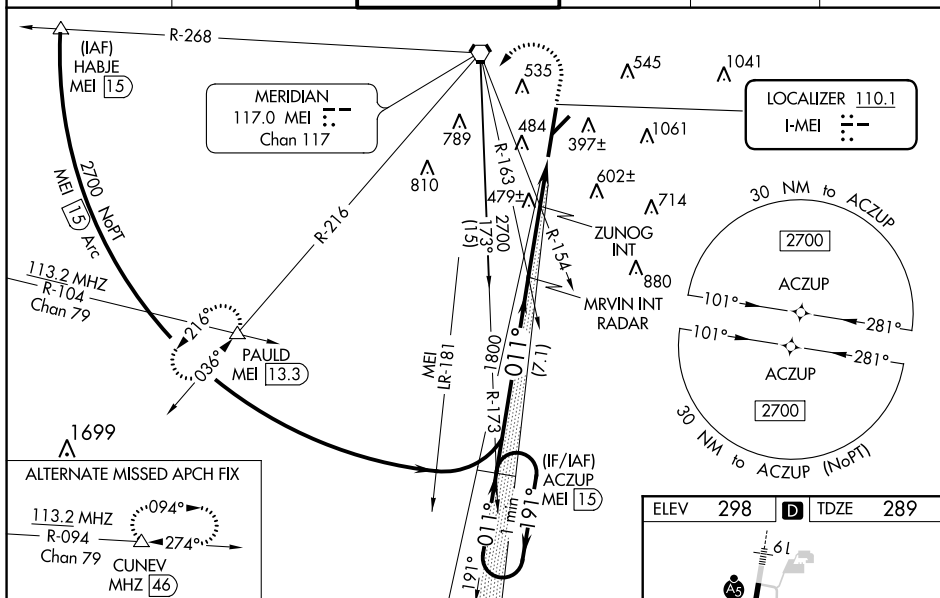

One Minute Holding Pattern 2700 ← 191° 011° →		ACZUP MEI 15		MRVIN INT RADAR		1100 ↑		3000 MEI R-216		PAULD △	
GS 3.00° TCH 55		1800		1800		ZUNOG INT		*900		*LOC only.	
		7.1 NM		2.6 NM		2 NM					
CATEGORY	A		B		C		D		E		
S-ILS 1	** 489/24 200 (200-½)										
S-LOC 1	900/24 611 (700-½)				900-1⅜ 611 (700-1⅜)						
CIRCLING	900-1 602 (700-1)				960-1¼		1120-2¾		1120-3		
					662 (700-1¼)		822 (900-2¼)		822 (900-3)		
ZUNOG FIX MINIMUMS											
S-LOC 1	700/24 411 (500-½)				700/40 411 (500-¾)						
CIRCLING	860-1 562 (600-1)		880-1 582 (600-1)		960-1¼ 662 (700-1¼)		1120-2¾ 822 (900-2¾)		1120-3 822 (900-3)		

