

WAAS CH 78412 W26A	APP CRS 254°	Rwy Idg TDZE 1487 Apt Elev 1497
--	------------------------	---

RNAV (GPS) RWY 26

EASTERN OREGON RGNL AT PENDLETON (PDT)


RNP APCH.

Circling Rwy 11 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.
#RVR 1800 authorized with the use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 4300 direct CESMI and on track 261° to PDT VORTAC and hold, continue climb-in-hold to 4300.

ASOS 118.325	SPOKANE APP CON * 133.15 379.15	PENDLETON TOWER * 119.7 (CTAF) 257.8	GND CON 121.9 257.8	UNICOM 122.95
------------------------	---	--	-------------------------------	-------------------------

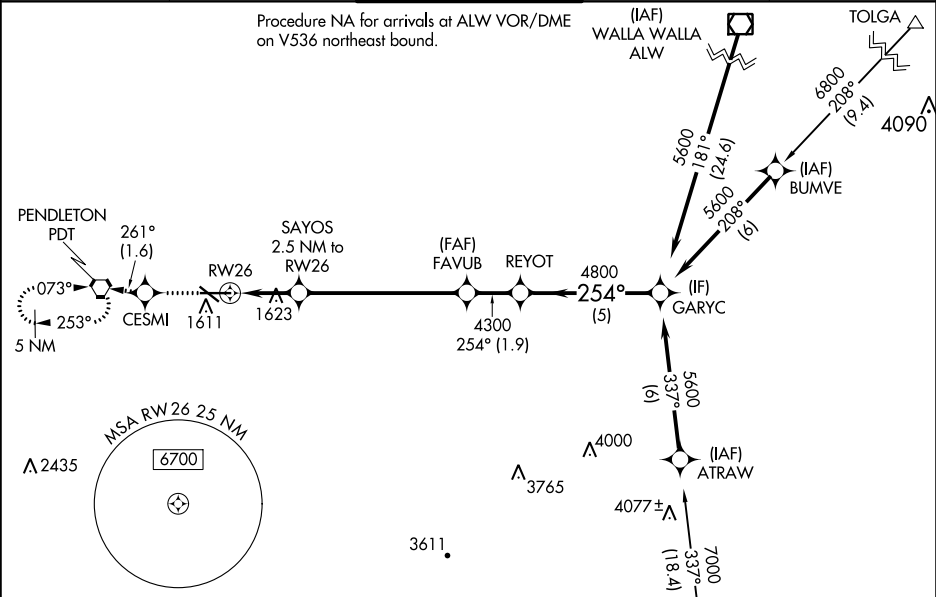

ELEV 1497	D	TDZE 1487
------------------	----------	------------------

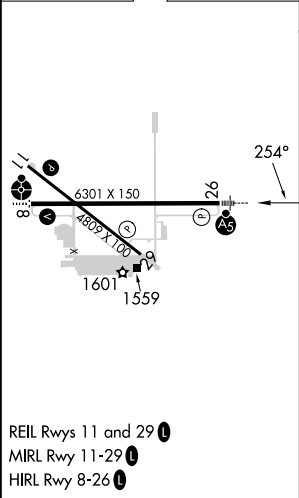

4300	CESMI	Ir 261°	PDT	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 48).	
* LNAV only		SAYOS 2.5 NM to RW26	FAVUB 4300	REYOT 4800	GARYC 5600
* 1.1 NM to RW26		2320*	4300	254°	GP 3.00° TCH 55
1.1 NM		1.4 NM	6 NM	1.9 NM	5 NM
CATEGORY	A	B	C	D	
LPV DA#	1687/24 200 (200-½)				
LNAV/VNAV DA	1800/24 313 (400-½)				
LNAV MDA	1880/24 393 (400-½)		1880/40 393 (400-¾)		
CIRCLING	1920-1 423 (500-1)	1960-1 463 (500-1)	1980-1½ 483 (500-1½)	2200-2¼ 703 (800-2¼)	