


LOC I-TVC	APP CRS	Rwy Idg	7016
110.7	279°	TDZE	616
		Apt Elev	624


ILS or LOC RWY 28
CHERRY CAPITAL (TVC)

RNP APCH - GPS.	MALSR 	MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 direct TVC VOR/DME and hold, continue climb-in-hold to 3000.
Aircraft not GPS equipped - RADAR required for procedure entry.		
▼ ▲ S-LOC 28 minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2 1/2 SM. AYATA FIX minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2 SM.		

ATIS 119.175	MINNEAPOLIS CENTER 132.9 338.3	TRAVERSE CITY TOWER ★ 124.2 (CTAF) 348.6	GND CON 121.8 348.6	UNICOM 122.95
-----------------	-----------------------------------	---	------------------------	------------------

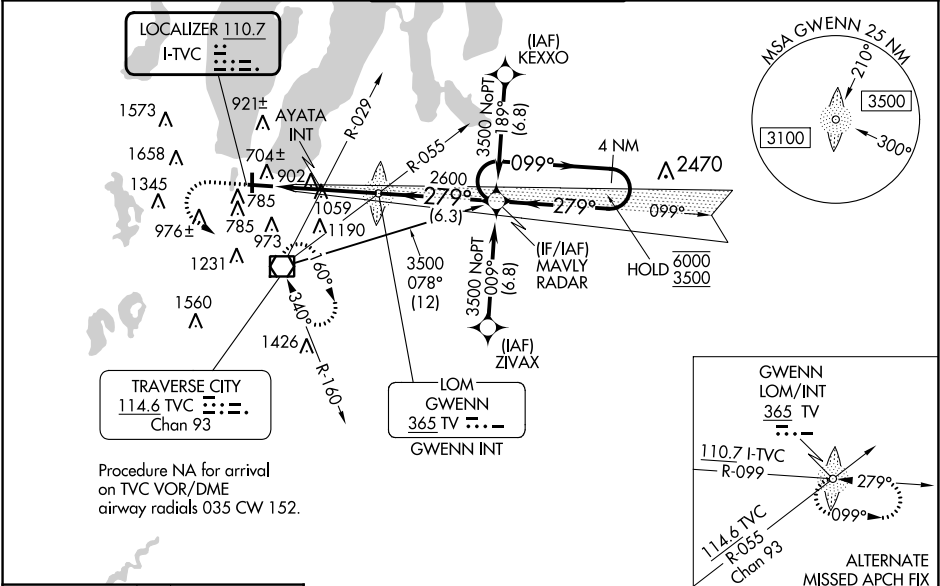

ELEV 624	D	TDZE 616
----------	---	----------

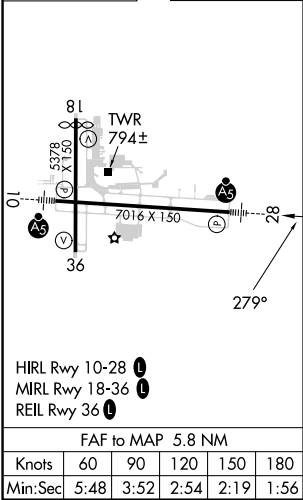

1100	3000	TVC	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 45).			
			TV LOM GWENN INT		MAVLY RADAR	4 NM Holding Pattern
CATEGORY		A	B	C	D	
S-ILS 28		816-½ 200 (200-½)				
S-LOC 28		1440-½ 824 (900-½)	1440-¾ 824 (900-¾)	1440-1⅞	824 (900-1⅞)	
 CIRCLING		1440-1¼ 816 (900-1¼)	1440-2½ 816 (900-2½)	1720-3 1096 (1100-3)		
AYATA FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)						
S-LOC 28		1320-½ 704 (700-½)	1320-1⅝ 704 (700-1⅝)			
 CIRCLING		1320-1 696 (700-1)	1420-2¼ 796 (800-2¼)		1720-3 1096 (1100-3)	

EC-1, 18 APR 2024 to 16 MAY 2024

EC-1, 18 APR 2024 to 16 MAY 2024