


RNAV (GPS) RWY 23
TRI-CITIES (TRI)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C (9°F) or above
A 34°C (93°F). Circling NA NW of Rwy 9-23. For inoperative ALS, increase LNAV Cats C
and D visibility to 1½ SM. Circling Rwy 9 NA at night.

MISSED APPROACH: Climb to 6400 direct HOSEM and hold, continue climb-in-hold to 6400.

122.95

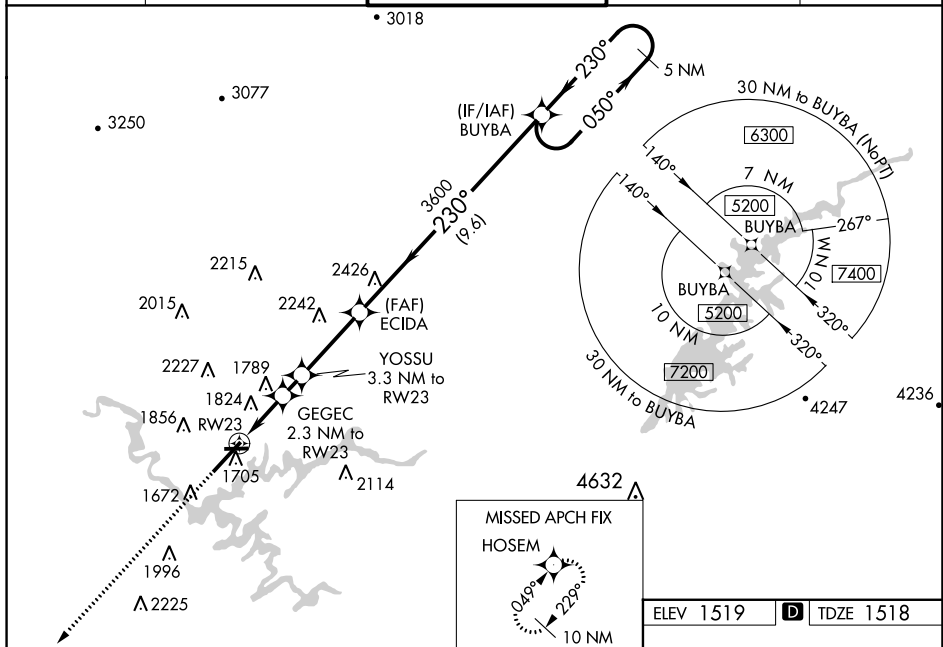


6400	HOSEM
	


VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 55).

BUYBA 5 NM
Holding Pattern

*LNAV only.

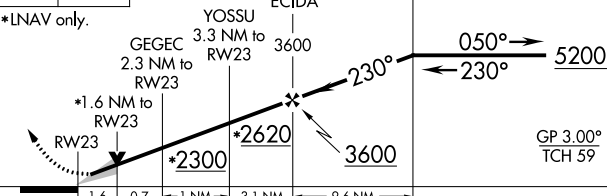

CATEGORY		A	B	C	D
LPV	DA	1718/18		200 (200-½)	
INAV/ VNAV	DA	2160-1¾		642 (700-1¾)	
INAV	MDA	2080/24 562 (600-½)		2080-1¼ 562 (600-1¼)	
 CIRCLING		2120-1 601 (700-1)	2180-1 661 (700-1)	2300-2¼ 781 (800-2¼)	2500-3 981 (1000-3)



REIL Rwy 5 and 27
HIRL Rwy 5-23
MIRL Rwy 9-27
TDZ/CI Rwy 23