

APP CRS	Rwy Idg	7110
211°	TDZE	404
	Apt Elev	410

RNAV (RNP) Z RWY 21R
TRI-CITIES (PSC)

T For uncompensated Baro-VNAV systems, procedure NA below -14°C (7°F) or above 54°C (130°F). GPS required. RF required. For inoperative MALSR, increase RNP 0.11 all Cats visibility to RVR 5700 and RNP 0.30 all Cats visibility to 1 $\frac{3}{8}$ mile.

MALSR



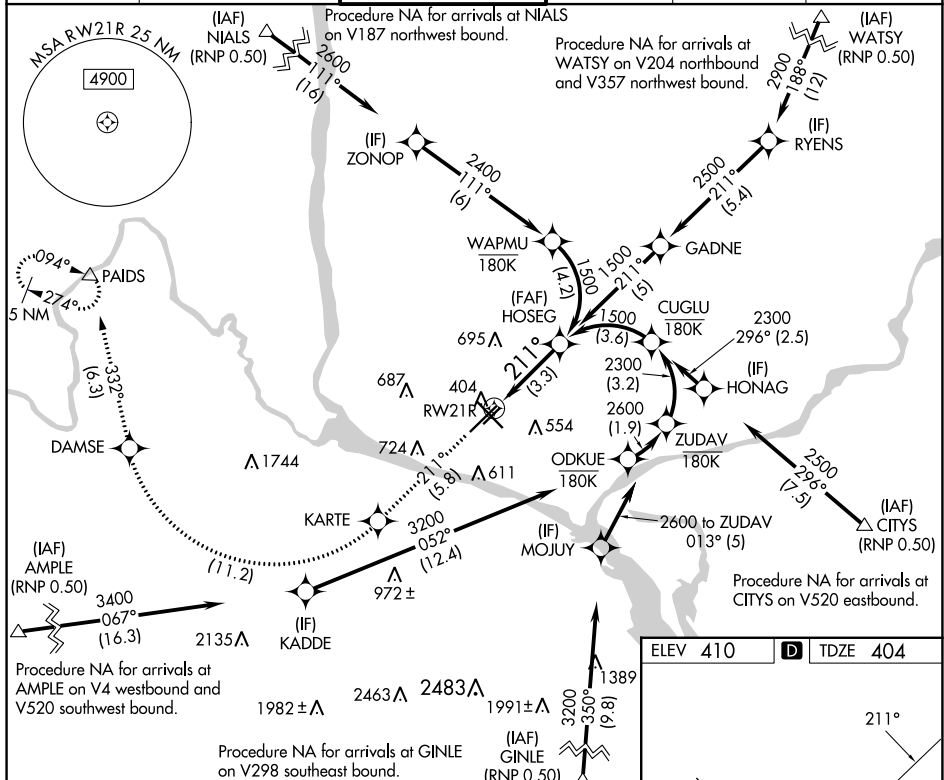
MISSED APPROACH: Climb to 5200 on track 211° to KARTE, right turn to DAMSE, and on track 332° to PAIDS and hold.

ATIS
125.65

SPOKANE APP CON
128.75 377.2

TRI-CITIES TOWER★
135.3 (CTAF) **Q** 323.3

GND CON
121.8

CLNC DEL
120.0UNICOM
122.95

ELEV 410	D	TDZE 404
----------	----------	----------

D

T

DZ

ZE

1

40

04

1

1

7

5200 ↑ tr 211°	KARTE ✦	DAMSE ✦	tr 332° △	HOSEG 1500
See planview for multiple IF locations.				
CATEGORY	A	B	C	D
RNP 0.11 DA	754/33 350 (400-%)			
RNP 0.30 DA	832/48 428 (500-1)			
AUTHORIZATION REQUIRED				

REIL Rwy 3L and 12
MIRL Rwy 12-30 **L**
HIRL Rwy 3L-21R **L**

RNAV (RNP) Z RWY 21R