

WAAS CH 58006 W12A	APP CRS 121°	Rwy Idg 7504 TDZE 402 Apt Elev 410
--	------------------------	---


RNAV (GPS) Y RWY 12

TRI-CITIES (PSC)

⚠ Baro-VNAV NA when using Hermiston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Hermiston altimeter setting. When local altimeter setting not received, use Hermiston altimeter setting: increase all DA 95 feet and all MDA 100 feet. Increase LPV all Cats visibilities ½ mile; LNAV/VNAV all Cats visibilities ⅓ mile; increase LNAV and Circling Cats C and D visibility ¼ mile.

MISSED APPROACH:
Climb to 900 then climbing left turn to 3200 direct CITYS and hold.

ATIS 125.65	SPOKANE APP CON ★ 128.75 377.2	TRI-CITIES TOWER ★ 135.3 (CTAF) 0 323.3	GND CON 121.8	CLNC DEL 120.0	UNICOM 122.95
-----------------------	--	---	-------------------------	--------------------------	-------------------------

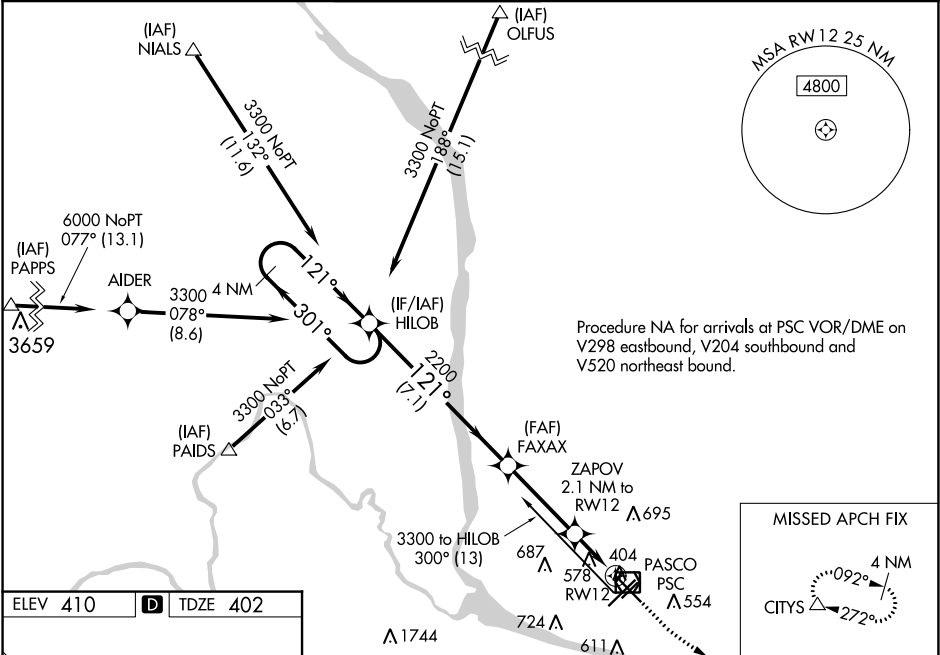

ELEV 410

D

TDZE 402

REIL Rwy 3L and 12
MIRA Rwy 12-30 **0**
HIRL Rwy 3L-21R **0**

4 NM Holding Pattern 3300 ← 301° 121° → GP 3.00° TCH 54				
HILOB FAXAX ZAPOV 2.1 NM to RW12 *1.2 NM to RW12 RW12 7.1 NM 3.4 NM 0.9 NM 1.2 NM				
CATEGORY A B C D				
LPV DA 602-³/₄ 200 (200-³/₄)				
LNAV/VNAV DA 755-1¹/₈ 353 (400-1¹/₈)				
LNAV MDA 840-1 438 (500-1) 840-1³/₈ 438 (500-1³/₈)				
C CIRCLING 880-1 470 (500-1) 940-1 530 (600-1) 1040-1³/₄ 630 (700-1³/₄) 1100-2¹/₄ 690 (700-2¹/₄)				