

WAAS CH 90113 W36A	APP CRS 002°	Rwy Idg 7094 TDZE 2131 Apt Elev 2131
--	------------------------	---

RNAV (GPS) RWY 36
KEARNEY RGNL (EAR)

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below
A -23°C or above 54°C. For inop ALS, increase LNAV/VNAV
 all Cats visibility to $\frac{7}{8}$ SM.

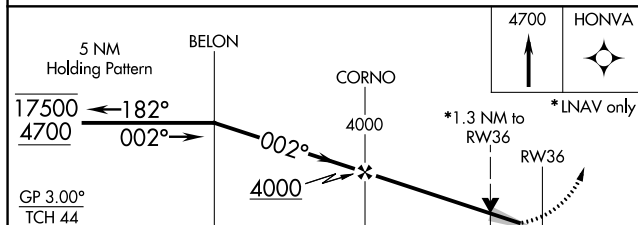
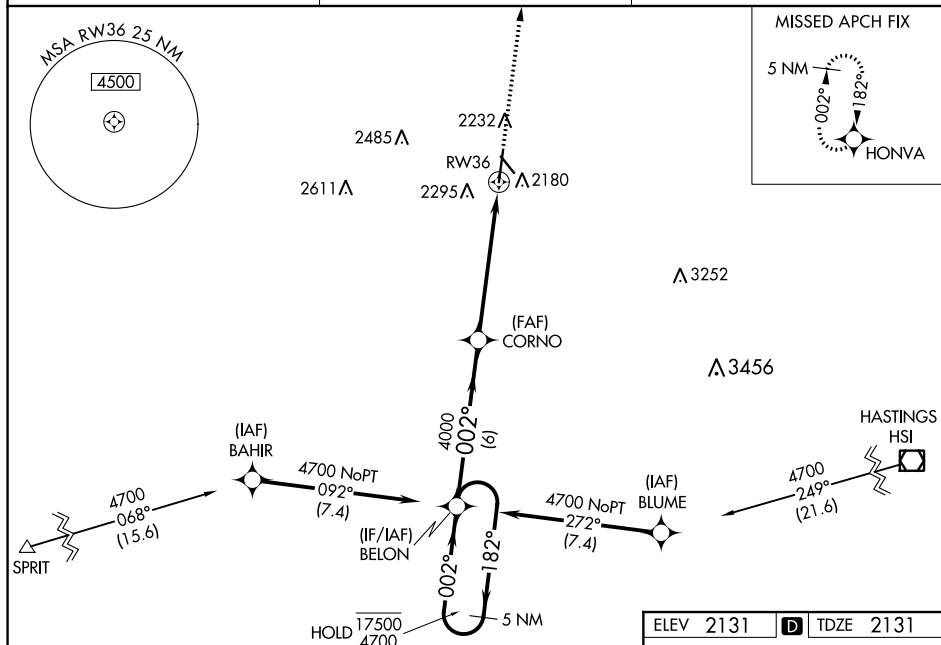
MALSR



MISSED APPROACH: Climb to 4700
direct HONVA and hold.

AWOS-3PT
123.875

MINNEAPOLIS CENTER
119.4 278.8

UNICOM
123.0 (CTAF) **L**

CATEGORY		A		B		C		D	
LPV	DA	2331-½ 200 (200-½)							
RNAV/ VNAV	DA	2419-½ 288 (300-½)							
RNAV	MDA	2580-½ 449 (500-½)				2580-⅞ 449 (500-⅞)			
 CIRCLING		2600-1 469 (500-1)				2640-1½ 509 (600-1½)		2840-2¼ 709 (800-2¼)	

