


WAAS CH 40002 W21A	APP CRS 208°	Rwy Idg TDZE Apt Elev	7619 4977 5045
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21L

PRESCOTT RGNL-ERNEST A LOVE FLD (PRC)

RNP APCH - GPS.				MALSR		MISSED APPROACH: Climb to 5500 then climbing right turn to 9100 direct DILLY and hold, continue climb-in-hold to 9100.	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 47°C. For inoperative ALS, increase LPV all Cats visibility to 1 SM, LNAV/VNAV all Cats visibility to 1½ SM, and LNAV Cat C/D visibility to 1¾ SM. Circling Rwy 3L, 12, 30 NA at night. # Missed approach requires a minimum climb of 345 feet per NM to 7300.							
ATIS 127.2	PHOENIX APP CON 133.575 281.55	PRESCOTT TOWER * 125.3 (CTAF) 257.9	GND CON 121.7	CLNC DEL 119.25	128.75 (12-30) 125.3 (CTAF) (3R-21L)	UNICOM 122.95	

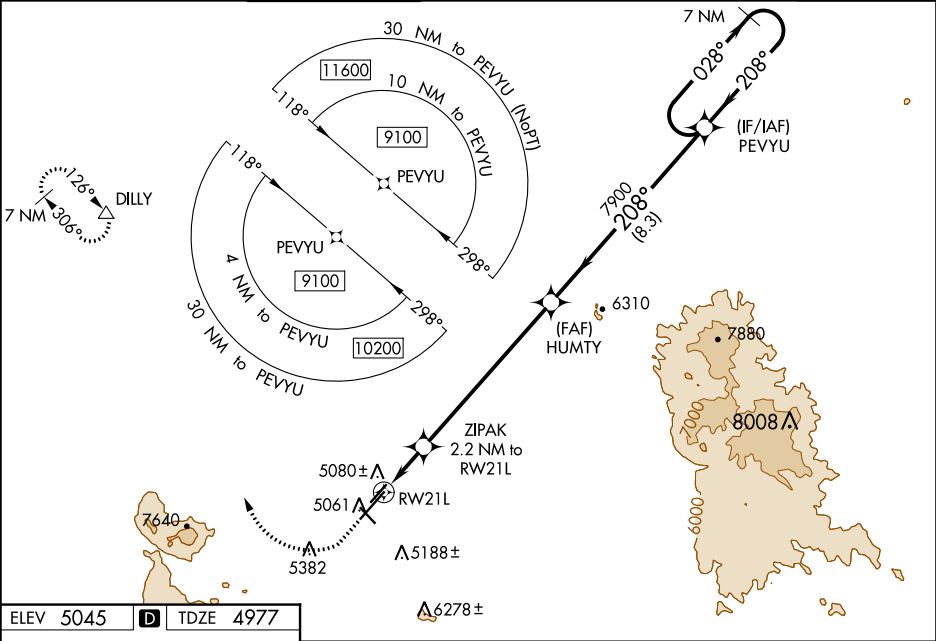

ELEV 5045	D	TDZE 4977
-----------	----------	-----------

		5500 9100 DILLY		ZIPAK 2.2 NM to RW21L		HUMTY 7900		PEVYU 7900		7 NM Holding Pattern	
*LNAV only.		*1.5 NM to RW21L		5700*		7900		208°		GP 3.00° TCH 55	
CATEGORY		A		B		C		D			
LPV DA		# 5177-½		200 (200-½)							
LPV DA		5277-½		300 (300-½)							
LNAV/VNAV DA		5391-⅞		414 (400-⅞)							
LNAV MDA		5480-½		503 (500-½)		5480-1		503 (500-1)			
CIRCLING		5520-1 475 (500-1)		5760-1 715 (800-1)		6080-3 1035 (1100-3)		6680-3 1635 (1700-3)			