



|               |         |          |       |
|---------------|---------|----------|-------|
| LOC/DME I-TFE | APP CRS | Rwy Idg  | 12004 |
| 111.9         | 185°    | TDZE     | 94    |
| Chan 56       |         | Apt Elev | 96    |

ILS or LOC RWY 18R

ORLANDO INTL (MCO)

|                                                     |       |                                                                                                                                                                          |
|-----------------------------------------------------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DME or RADAR required.<br>RNP APCH-GPS. From YAGGO. | MALSR | MISSED APPROACH: Climb to 500 then climbing right turn to 4000 on heading 270° and on ORL VORTAC R-227 to CAMBE INT/ORL 20 DME and hold, continue climb-in-hold to 4000. |
| Simultaneous approach authorized.                   |       |                                                                                                                                                                          |

|             |                 |                                      |              |          |       |
|-------------|-----------------|--------------------------------------|--------------|----------|-------|
| D-ATIS      | ORLANDO APP CON | ORLANDO TOWER                        | GND CON      | CLNC DEL | CPDLC |
| ARR 121.25  | 124.8 307.0     | 118.45 253.5 (Rwys 17L-35R, 17R-35L) | 126.4 (East) | 134.7    |       |
| DEP 120.525 |                 | 124.3 253.5 (Rwys 18L-36R, 18R-36L)  | 121.8 (West) | 341.7    |       |

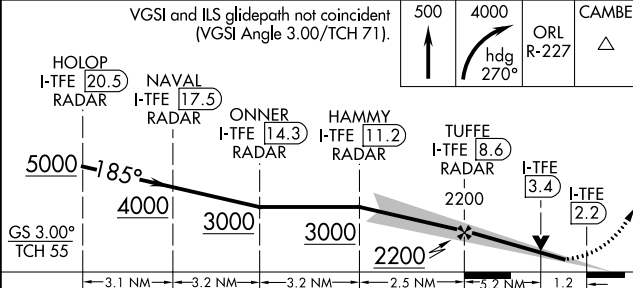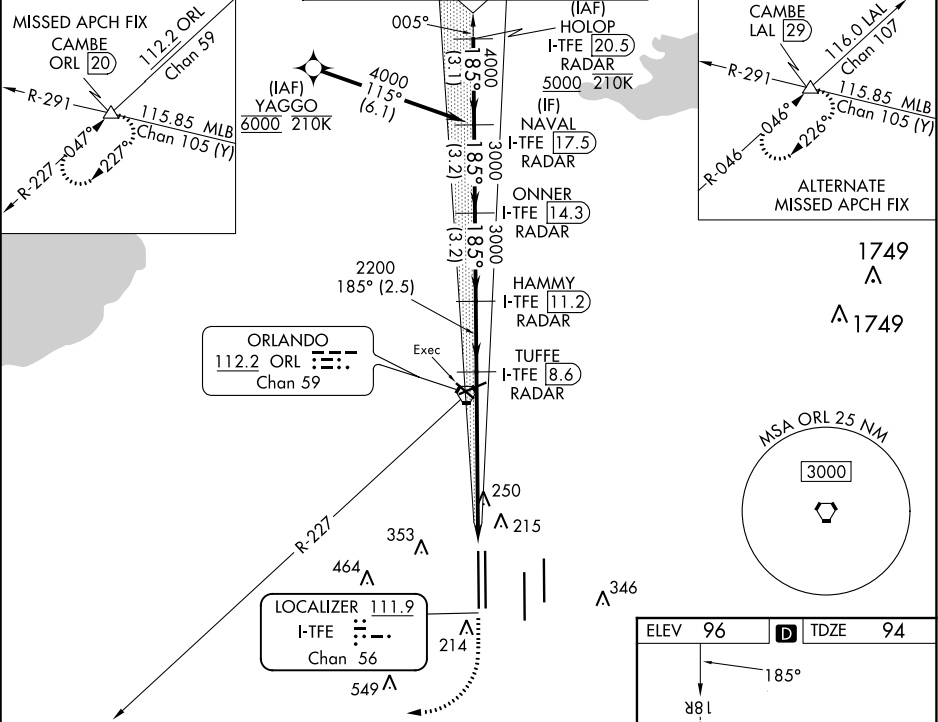

|           |                      |                           |                   |   |
|-----------|----------------------|---------------------------|-------------------|---|
| CATEGORY  | A                    | B                         | C                 | D |
| S-ILS 18R | 294/18               | 200 (200-1/2)             |                   |   |
| S-LOC 18R | 540/24 446 (500-1/2) | 540/45 446 (500-7/8)      |                   |   |
| CIRCLING  | 740-1 644 (700-1)    | 740-1 3/4 644 (700-1 3/4) | 740-2 644 (700-2) |   |

