

WAAS CH 56210 W04A	APP CRS 041°	Rwy Idg TDZE Apt Elev	7826 652 661
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4

GENERAL DOWNING-PEORIA INTL (PIA)

RNP APCH.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. VDP and Baro-VNAV NA with Logan County altimeter setting. When local altimeter setting not received, use Logan County altimeter setting and increase all DA 89 feet and all MDA 100 feet, increase LNAV/VNAV all Cats visibility 1/8 mile, LNAV Cat C and D visibility 1/4 mile, and Circling Cat C 1/4 mile and Cat D 1/2 mile. For inoperative MALSR using Logan County altimeter setting, increase LPV all Cats visibility to 1 mile. For inop ALS, increase LNAV Cat C/D visibility to 1 SM. Circling Rwy 13, 31 NA at night.

MALSR

MISSED APPROACH:
Climb to 2300 direct WEKAR and hold.

ATIS 126.1 282.2	SAINT LOUIS APP CON 125.8 269.2	PEORIA TOWER 124.0 353.85	GND CON 121.85 348.6
----------------------------	---	-------------------------------------	--------------------------------

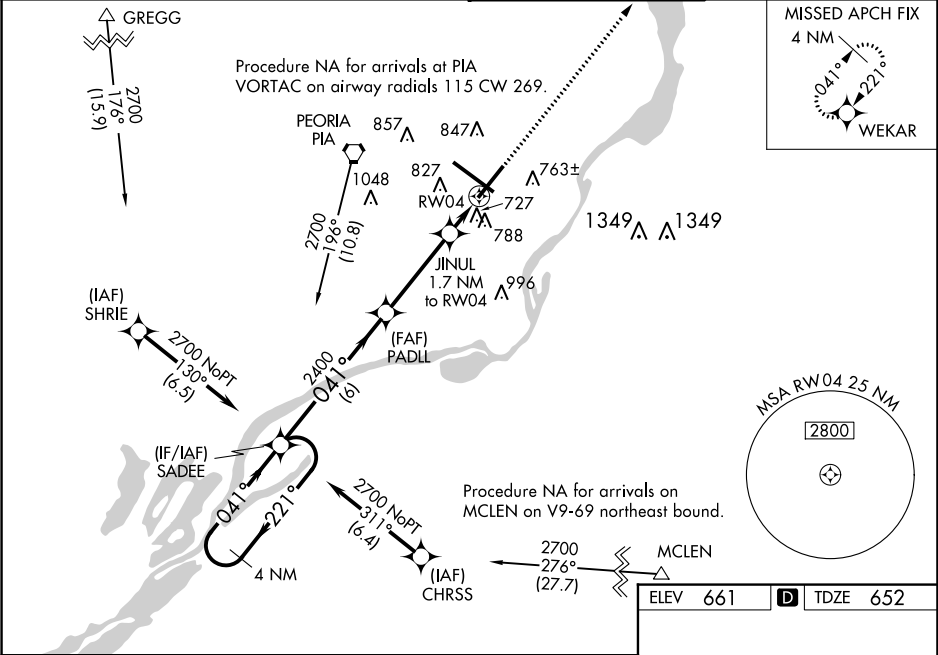

4 NM Holding Pattern		SADEE		PADLL		JINUL		2300 WEKAR	
2700		←221°		041°→		041°		*LNAV only	
GP 3.00°		TCH 55		2400		*1220		*0.9 NM to RW04	
		6 NM		3.7 NM		0.8		0.9	
CATEGORY		A		B		C		D	
LPV	DA	857-1/2		205 (200-1/2)					
LNAV/VNAV	DA	905-1/2		253 (300-1/2)					
LNAV	MDA	1000-1/2		348 (400-1/2)		1000-5/8		348 (400-5/8)	
CIRCLING		1160-1		499 (500-1)		1180-1 1/2		1400-2 1/4	
						519 (600-1/2)		739 (800-2/4)	

