

WAAS CH 66034 W10A	APP CRS 120°	Rwy ldg TDZE 589 Apt Elev 592
--	------------------------	---

RNAV (GPS) RWY 10L

NIAGARA FALLS INTL (IAG)

▼


DME/DME RNP-0.3 NA. VDP NA with Buffalo Niagara Intl altimeter setting. When local altimeter setting not received, use Buffalo Niagara Intl altimeter setting and increase all MDA 60 feet.

⚠

Increase LP Cats C/D and Circling Cats C/D visibility ¼ mile. Rwy 10L helicopter visibility reduction below ¾ SM NA. Rwy 6, 10R, 24, 28L helicopter visibility reduction below 1 SM NA. Circling Rwy 6, 10R, 24, 28L NA at night.

MISSED APPROACH: Climb to 1100 then climbing left turn to 3600 direct DIONE and hold.

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER ★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	CLNC DEL 119.25 251.1	UNICOM 122.95
----------------------------	---------------------------------------	--	-------------------------------	---------------------------------	-------------------------

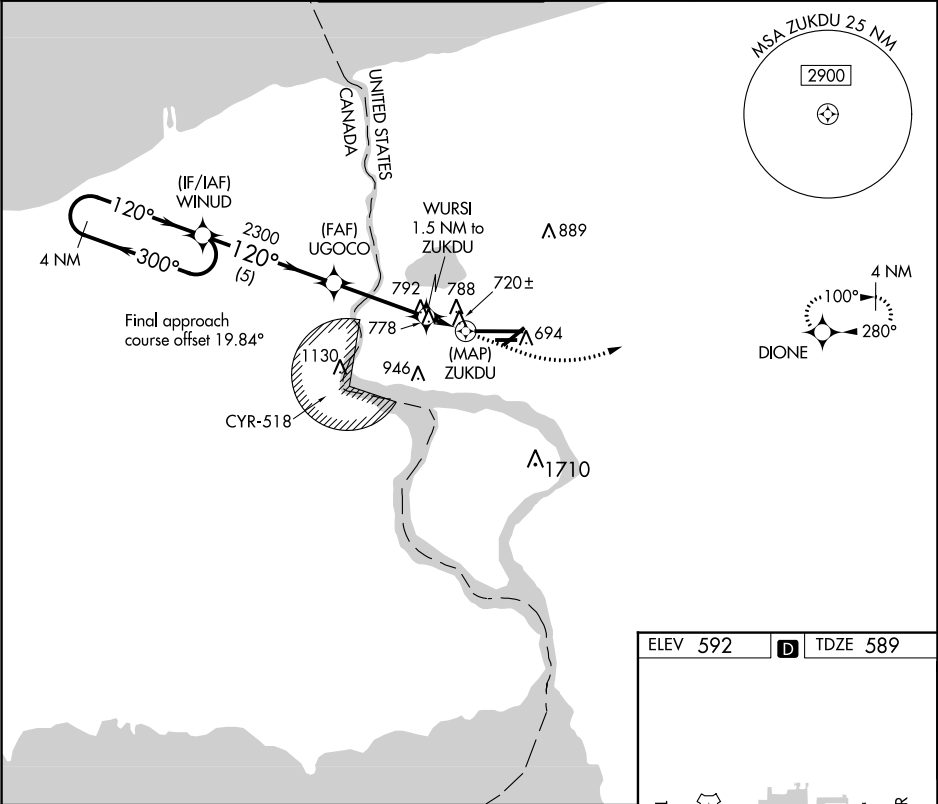

4 NM Holding Pattern

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).

1100 3600 DIONE

WINUD UGOCO WURSI 1.5 NM to ZUKDU 0.6 NM to ZUKDU ZUKDU

3100 300° 120° 2300 1220

5 NM 3.5 NM 0.9 NM 0.6 NM 0.5

CATEGORY	A	B	C	D
LP MDA	980-1 391 (400-1)	980-1½ 391 (400-1½)		
LNAY MDA	1040-1 451 (500-1)	1040-1¾ 451 (500-1¾)		
✈ CIRCLING	1100-1 508 (600-1)	1280-2 688 (700-2)	1280-2¼ 688 (700-2¼)	

ELEV 592 D TDZE 589

TDZ/CL Rwy 28R 0

REIL Rws 6, 10R, 24, and 28L 0

HIRL Rwy 10L-28R 0

MIRL Rws 6-24 and 10R-28L 0