


ATIS
134.5
CLNC DEL
120.6 350.2
GND CON
121.9 348.6
ST. PETERSBURG-CLEARWATER TOWER ★
118.3 (CTAF) 257.8
TAMPA DEP CON
125.3 316.05

TOP ALTITUDE:
1600

RNAV 1 - DME/DME/IRU or GPS required.
RADAR required.

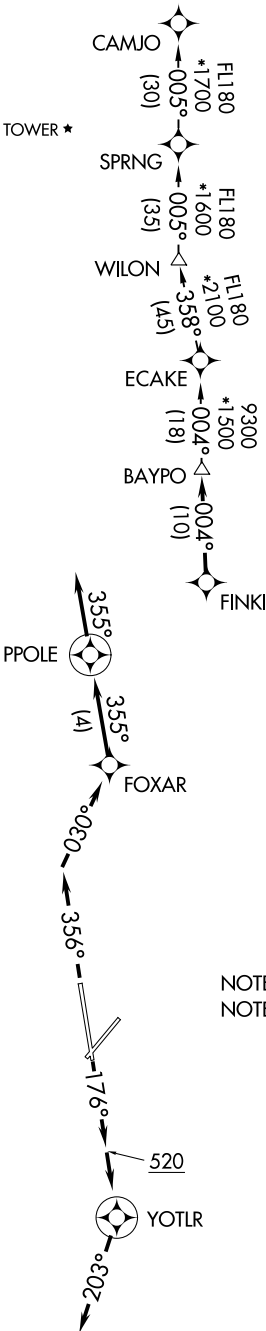

TAKEOFF MINIMUMS
Rwys 4, 22: NA - ATC.
Rwys 18, 36: Standard with minimum climb
of 500' per NM to 520.

NOTE: Jets only.
NOTE: WILON TRANSITION for use by aircraft filed
to Jacksonville area airports only,
or as assigned by ATC.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 18: Climb on heading 176° to 520, then direct YOTLR, then on heading 203° or as assigned by ATC, for vectors to FINKI, thence

TAKEOFF RUNWAY 36: Climb on heading 356° to intercept course 030° to FOXAR, then on track 355° to PPOLE, then on track 355°. Expect vectors to FINKI, thence

. . . . on track 004° to BAYPO. Maintain 1600. Expect clearance to filed altitude within ten minutes after departure.

CAMJO TRANSITION (BAYPO1.CAMJO)
WILON TRANSITION (BAYPO1.WILON)

SE-3, 18 APR 2024 to 16 MAY 2024

SE-3, 18 APR 2024 to 16 MAY 2024