

LOC I-FFV
111.3

APP CRS
139°

Rwy Idg
TDZE
Apt Elev
7540
23
30

ILS or LOC RWY 14

SARASOTA/BRADENTON INTL (SRQ)


DME or RADAR required for LOC only.

When control tower closed, S-ILS 14 Minimums NA; increase S-LOC 14 Cats A and B and ETIGY Fix Minimums S-LOC 14 all Cats visibility to 1 mile. When control tower closed, inop table does not apply to S-LOC 14 Cats A and B and ETIGY Fix Minimums S-LOC 14 all Cats.


MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 on SRQ VOR/DME R-118 to MURDO INT/SRQ 13.6 DME and hold.

ATIS 124.375	TAMPA APP CON 119.65 353.575	SARASOTA TOWER ★ 120.1(CTAF) 256.8	GND CON 121.9 273.6	CLNC DEL 118.25	UNICOM 122.95
------------------------	--	--	-------------------------------	---------------------------	-------------------------

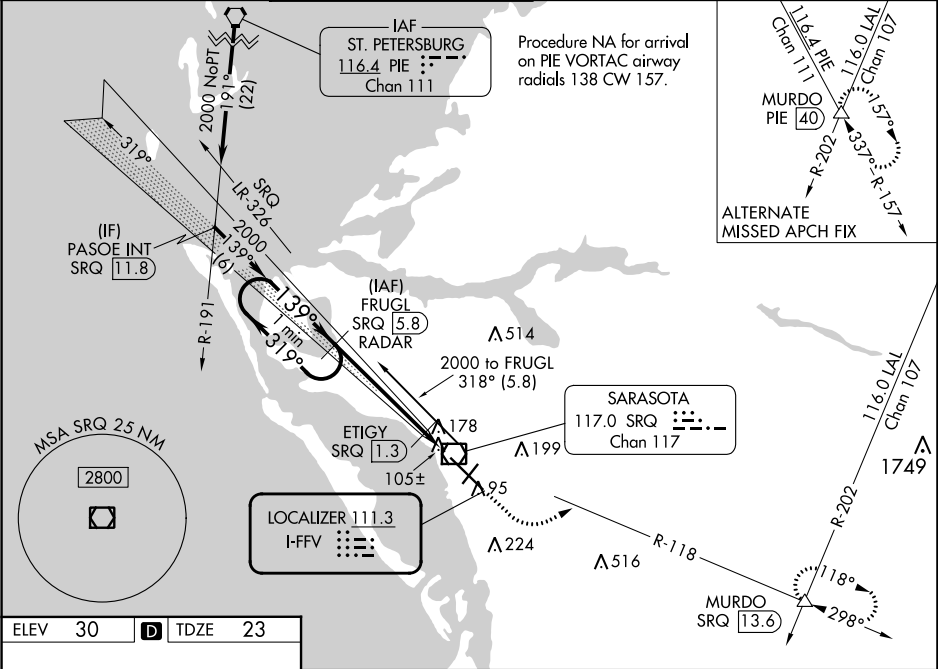

ELEV 30	D	TDZE 23
---------	---	---------

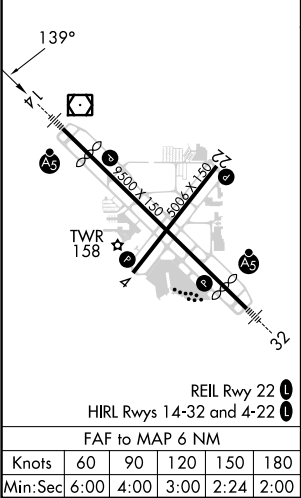

One Minute Holding Pattern		FRUGL SRQ 5.8 RADAR	1000	2000	MURDO
			↑	SRQ R-118	△
			*LOC only.		
2000 ← 319°		2000 → 139°	2000	ETIGY SRQ 1.3	
GS 3.00°		TCH 54		*500	
		4.5 NM	1.5 NM		
CATEGORY	A	B	C	D	
S-ILS 14	223-½ 200 (200-½)				
S-LOC 14	500-½	477 (500-½)	500-1	477 (500-1)	
CIRCLING	500-1	470 (500-1)	600-1½	600-2	
ETIGY FIX MINIMUMS					
S-LOC 14	360-½ 337 (400-½)				
CIRCLING	500-1	470 (500-1)	600-1½	600-2	
			570 (600-½)	570 (600-2)	