



APP CRS	Rwy Idg	5000
333°	TDZE	999
	Apt Elev	1009

RNAV (GPS) RWY 33

WORCESTER RGNL (ORH)

RNP APCH.	When local altimeter setting not received, use Bedford altimeter setting and increase all MDAs 200 feet and visibility LNAV Cat C/D ¾ SM and visibility Circling Cat B ¼ SM. VDP NA with Bedford altimeter setting.	MISSED APPROACH: Climbing left turn to 3000 direct GRIPE and hold.
-----------	---	---

ATIS	BRADLEY APP CON	WORCESTER TOWER★	GND CON	CLNC DEL	CLNC DEL	UNICOM
126.55	119.0 327.1	120.5 (CTAF) 263.0	123.85	128.65	119.0 (When twr closed)	122.95

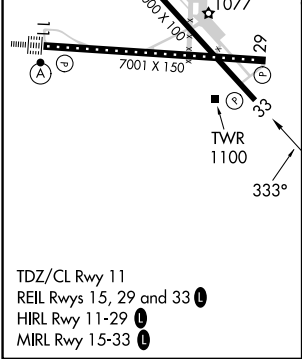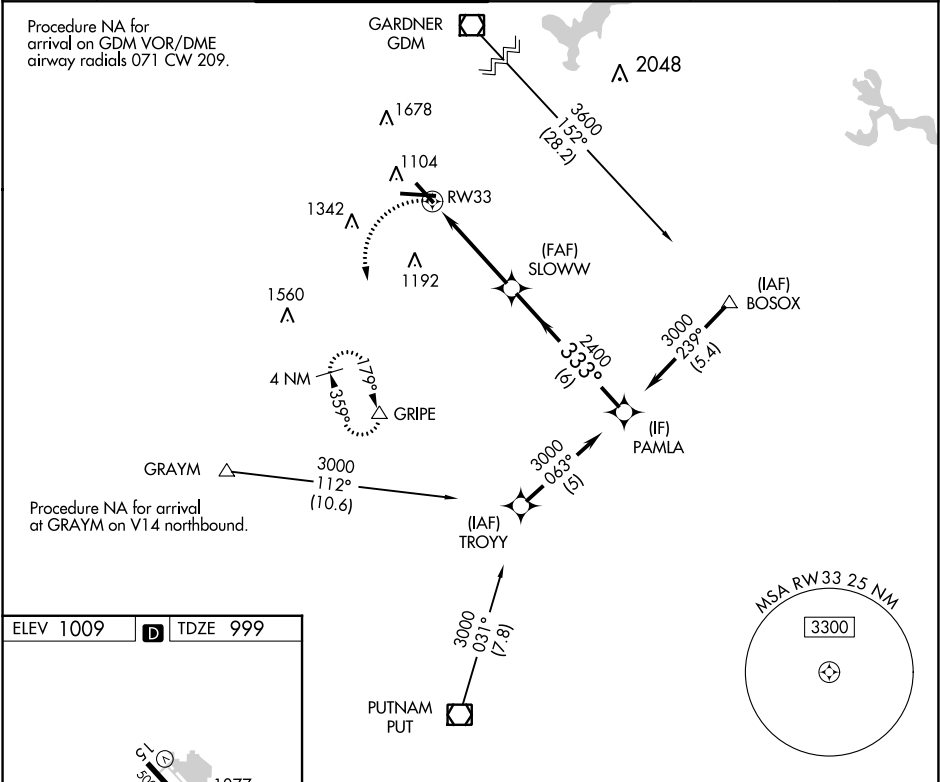

3000		GRIPE		Procedure Turn NA	
1.1 NM to RW33		SLOWWW		PAMLA	
RW33		SLOWWW		PAMLA	
1.1		3.1 NM		6 NM	
CATEGORY		A		B	
LNAV MDA		1480-1 482 (500-1)		1480 -1¾ 482 (500-1¾)	
CIRCLING		1560-1 551 (600-1) 1720-1 711 (800-1)		2000-3 991 (1000-3)	