

LOC/DME I-SIC 111.55 Chan 52 (Y)	APP CRS 186°	Rwy Idg TDZE 875 Apt Elev 896	ILS RWY 18C (SA CAT I & II) CINCINNATI/NORTHERN KENTUCKY INTL (CVG)
--	------------------------	---	---


RADAR required for procedure entry. DME or RADAR required.

Simultaneous approach authorized. SA CAT I: Requires specific OPSPEC, MSPEC, or LOA approval and use of HUD to DH.
SA CAT II: Reduced Lighting: Requires specific OPSPEC, MSPEC, or LOA approval and use of autoland or HUD to touchdown.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 on CVG R-174 to ZIRKE INT/CVG 15.1 DME and hold.

D-ATIS ARR 134.375 DEP 135.3	CINCINNATI APP CON 119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	CINCINNATI TOWER 118.975 360.85 (Rwy 18L/36R) 118.3 (Rwys 18C/36C, 09/27) 133.325 (Rwy 18R/36L)	GND CON 121.7	CLNC DEL 127.175	CPDLC
---	--	---	-------------------------	----------------------------	-------

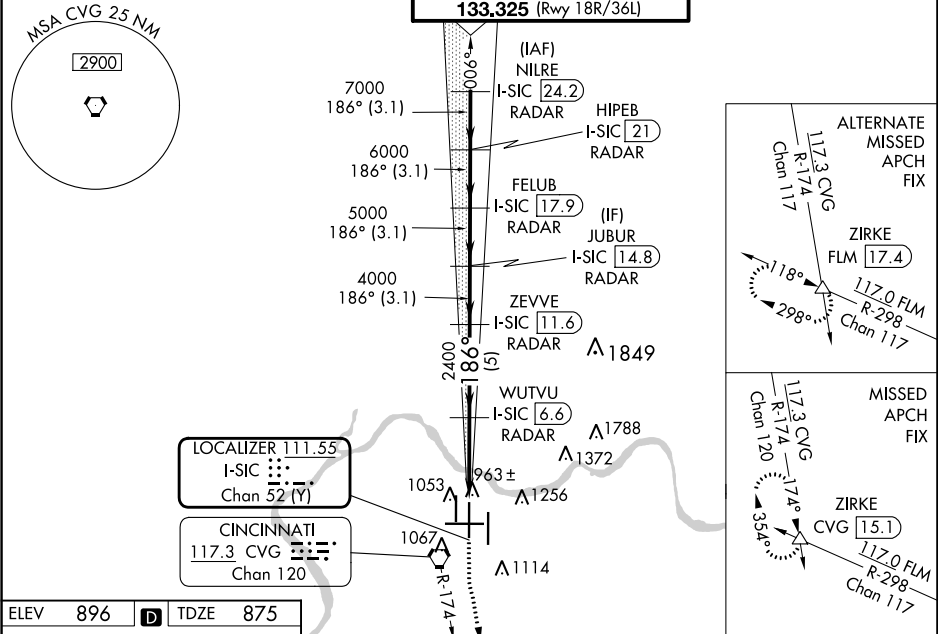

ELEV 896 TDZE 875

HIRL all Rwys
TDZ/CL all Rwys except 27

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

1500 3000 ZIRKE
CVG R-174

8000 7000 6000 5000 4000 2400

GS 3.00° TCH 55

CATEGORY	A	B	C	D
S-ILS 18C	SA CAT I RA 191/16 150 DA 1025			
S-ILS 18C	SA CAT II RA 100/12 100 DA 975			

SA CATEGORY I & II ILS-SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED