

24081


RNAV (RNP) Z RWY 27
CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

T For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C . For inop ALS, increase RNP 0.23 all Cats visibility to $1\frac{3}{8}\text{ SM}$ and increase RNP 0.30 all Cats visibility to $1\frac{5}{8}\text{ SM}$.

MALSR

MISSED APPROACH: Climb to 3000 on track 276° SEMSE and on track 220° to AVIEW and hold.

D-ATIS		CINCINNATI APP CON		CINCINNATI TOWER		GND CON	CLNC DEL	CPDLC
ARR	DEP	119.7	363.15 (090°-269°)	118.975	360.85 (RWY 18L/36R)			
134.375	135.3	123.875	363.15 (270°-089°)	118.3	(RWYS 18C/36C, 09/27)	121.7	127.175	
				133.325 (RWY 18R/36L)				

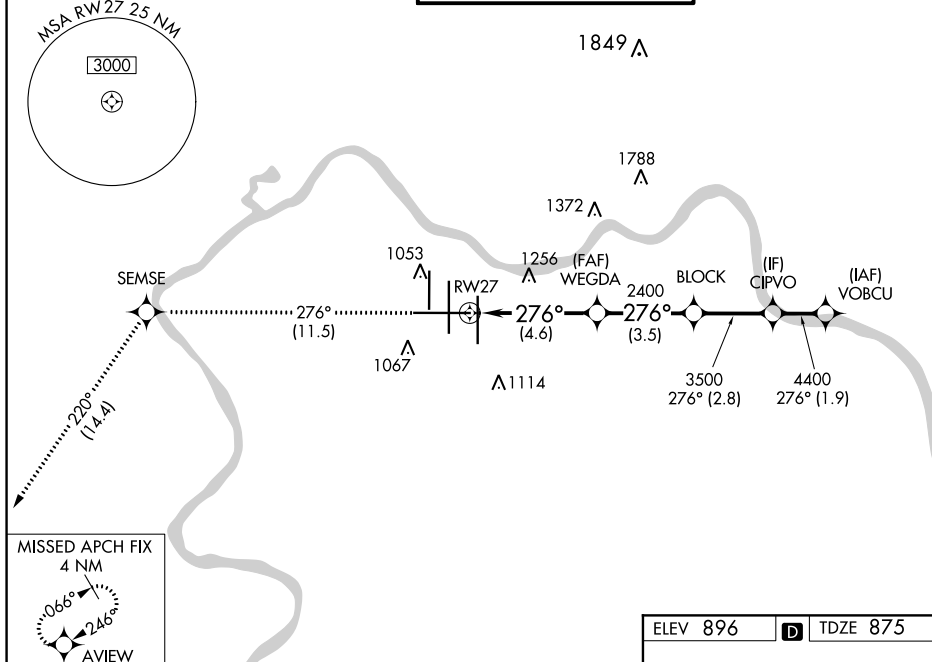

CATEGORY	A	B	C	D
RNP 0.15 DA	1296/40	421 (500-¾)		
RNP 0.23 DA	1378/55	503 (500-1)		
RNP 0.30 DA	1445-1¼	570 (600-1¼)		

AUTHORIZATION REQUIRED

