

WAAS CH 97623 W15A	APP CRS 151°	Rwy Idg 4500 TDZE 45 Apt Elev 47
--	------------------------	---

RNAV (GPS) RWY 15


NANTUCKET MEML (ACK)

RNP APCH.

T Baro-VNAV NA when using Hyannis altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. Rwy 15 helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use Hyannis altimeter setting and increase LPV DA to 358, LNAV/VNAV DA to 543, and all MDA 80 feet; increase LNAV/VNAV all Cats and LNAV Cats C and D visibility $\frac{1}{4}$ mile.

MISSED APPROACH: Climb to 2300 direct DUPKE and hold.

ATIS 127.5	BOSTON APP CON ★ 126.1 318.1	NANTUCKET TOWER ★ 118.3 (CTAF) 0	GND CON 132.5	CLNC DEL 119.375	UNICOM 122.95
---------------	---------------------------------	-------------------------------------	------------------	---------------------	------------------

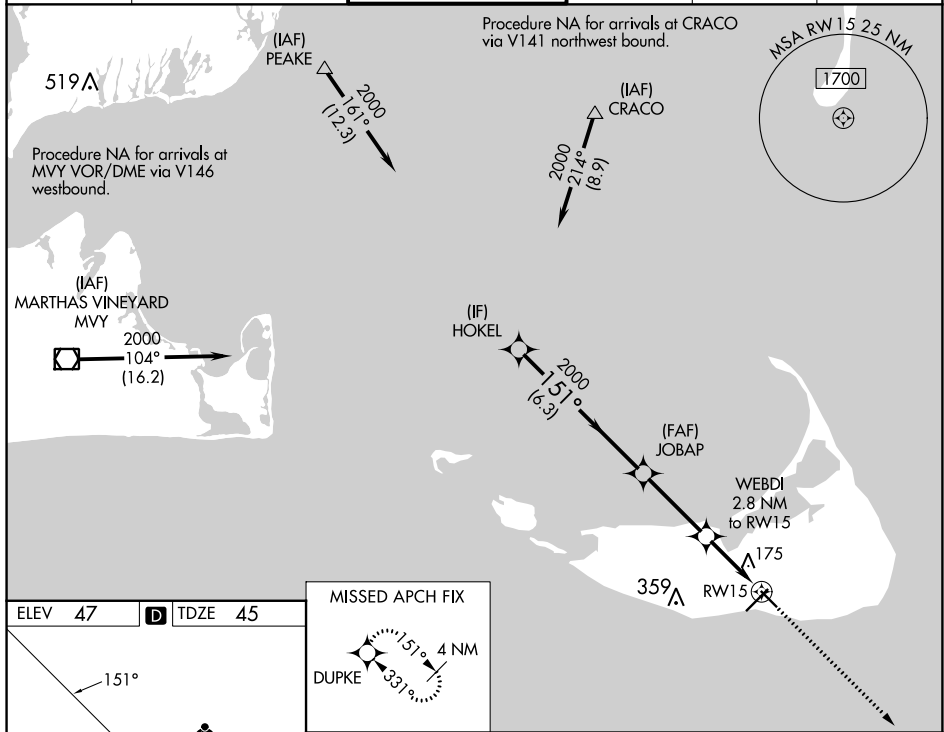

HIRL Rwy 6-24

CATEGORY	A	B	C	D
LPV DA	295-1 250 (300-1)			
LNAV/VNAV DA	480-1½ 435 (500-1½)			
LNAV MDA	440-1 395 (400-1)		440-1⅛ 395 (400-1¼)	

* LNAV only.