

WAAS CH 61115 W28A	APP CRS 284°	Rwy Idg 8204 TDZE 5459 Apt Elev 5516
--	------------------------	---

RNAV (GPS) RWY 28
CENTRAL WYOMING RGNL (RIW)

RNP APCH - GPS.


⚠ Baro-VNAV and VDP NA when using Lander altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C or above 48°C. For inop MALSR, increase LNAV/VNAV all Cats visibility to ¾ mile and LNAV Cat C and D visibility to 1 mile. When local altimeter setting not received, use Lander altimeter setting: increase LPV DA to 5713 feet, LNAV/VNAV DA to 5763 and all visibilities ½ mile; increase all MDA 60 feet and LNAV Cat C and D visibility ½ mile. For inop MALSR, when using Lander altimeter setting, increase LPV all Cats visibility to ¾ mile and LNAV/VNAV all Cats visibility to 1 mile.

MALSR

AS

MISSED APPROACH:
Climb to 7900 direct
TIDHU and hold.

ASOS 121.425	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF) 1
------------------------	---	--

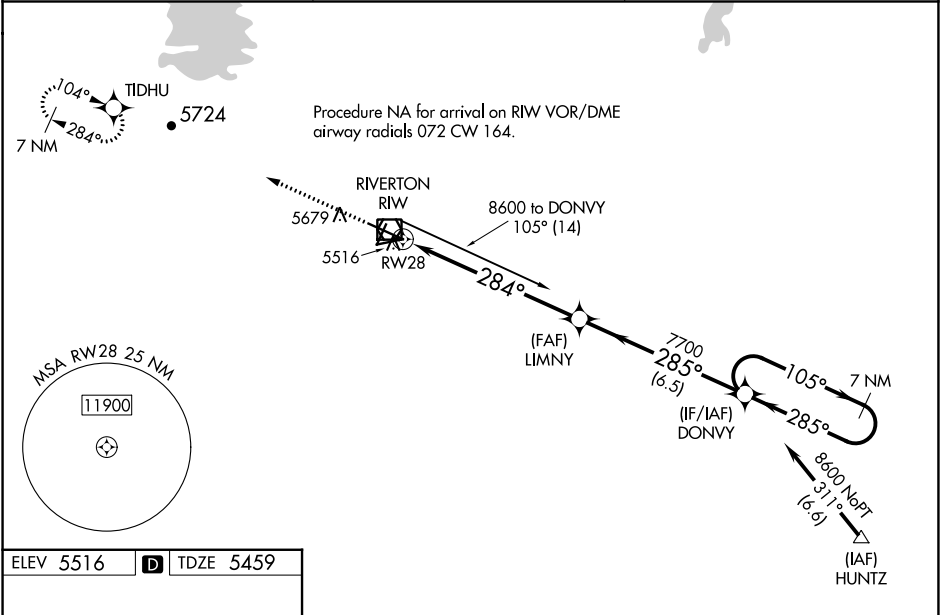

ELEV 5516	D	TDZE 5459
-----------	----------	-----------

10 NM
1.1% DOWN
0.4% UP
0.7% UP
5513
284°

7900 TIDHU

1 NM to RW28

RW28

1 NM

5.9 NM

LIMNY 7700

284°

285°

7700

DONVY

7 NM Holding Pattern

105°

8600

285°

GP 3.00°
TCH 50

CATEGORY	A	B	C	D
LPV DA	5659-½		200 (200-½)	
LNAV/VNAV DA	5709-½		250 (200-½)	
LNAV MDA	5820-½	361 (400-½)	5820-⅝	361 (400-⅝)
C CIRCLING	6000-1	484 (500-1)	6000-1½ 484 (500-1½)	6120-2 604 (700-2)

REIL Rwy 1, 10, and 19 **1**

MIRL Rwy 1-19 **1**

HIRL Rwy 10-28 **1**

NW-1, 18 APR 2024 to 16 MAY 2024

NW-1, 18 APR 2024 to 16 MAY 2024