

23110


RNAV (GPS) RWY 30
DECATUR (DEC)

⚠ For uncompensated baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.

⚠ When local altimeter setting not received, use Lincoln altimeter setting and increase all DA/MDA 80 feet, increase LNAV Cat C/D and Circling Cat C/D visibility $\frac{1}{4}$ SM. Baro-VNAV and VDP NA when using Lincoln altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
YENVU and hold.

ATIS 126.35	CHAMPAIGN APP CON ★ 132.85 290.225	DECATUR TOWER ★ 118.9 (CTAF) 0 291.775	GND CON 121.75 291.775	UNICOM 122.95
----------------	---------------------------------------	---	---------------------------	------------------

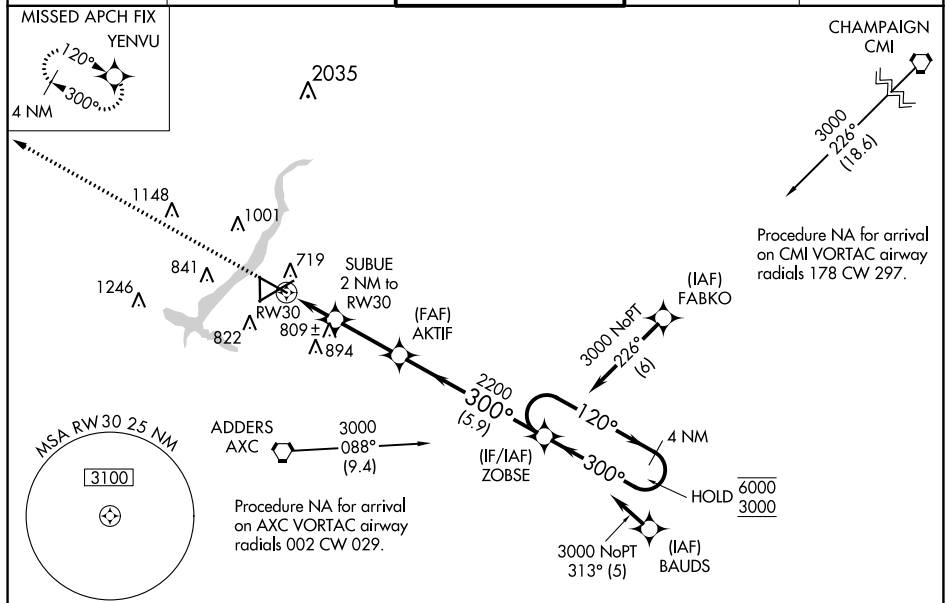

ELEV	682	D	TDZE	679
------	-----	----------	------	-----

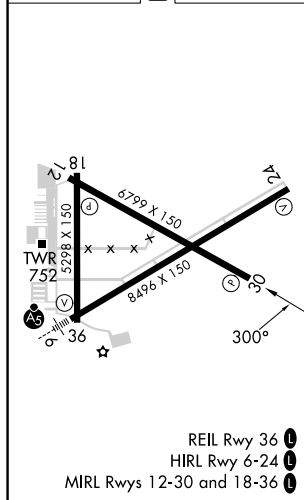


Figure 1-1 illustrates a 4 NM Holding Pattern. The pattern is defined by a series of turns: a 120° turn followed by a 300° turn. The distance between turns is 1 NM. The pattern is centered on the ZOBSE fix, which is 2.6 NM from the SUBUE fix. The pattern is 4 NM wide. The diagram also shows the 1360-1 and 1360-2 frequency pairs, and the 1240-1 and 1240-2 frequency pairs. The pattern is labeled "4 NM Holding Pattern" and "ZOBSE".

DECATUR (DEC)
RNAV (GPS) RWY 30

EC-3, 18 APR 2024 to 16 MAY 2024