

LOC I-AWO	APP CRS	Rwy Idg	5332
111.5	342°	TDZE	135
		Apt Elev	142

LOC RWY 34


ARLINGTON MUNI (AWO)

ADF required. When local altimeter setting not received, use Whidbey Island NAS (Ault Field) altimeter setting: increase all MDA 80 feet and visibility S-34 Cats C and D and Circling Cats B and C ¼ SM. For inop MALS, increase S-34 Cats C and D visibility to 1 ¾.

MALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct WATON LOM and hold.

AWOS-3PT	SEATTLE APP CON	CLNC DEL	CTAF
135.625	128.5 306.9	121.725	122.725

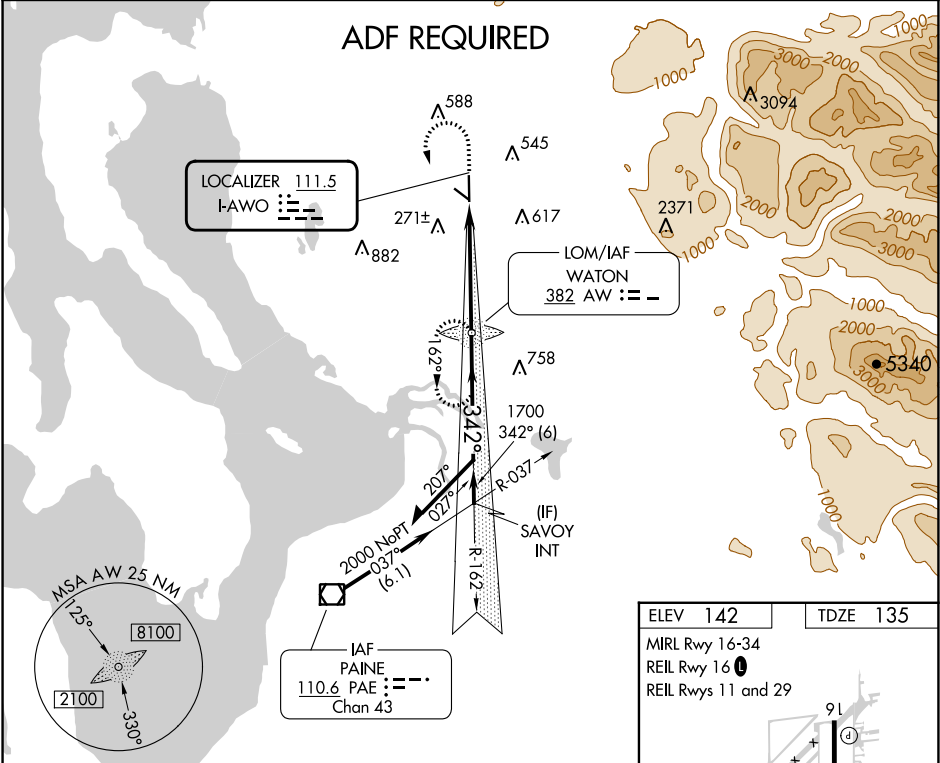

Remain within 10 NM		AW LOM	6000	1000	2000	AW
2000	162°	342°	1700	3.05°	TCH 46	
		4.7 NM				
CATEGORY	A	B	C	D		
S-34	580-¾	445 (500-¾)	580-1	445 (500-1)		
CIRCLING	840-1 698 (700-1)	900-1 758 (800-1)	1000-2½ 858 (900-2½)	1040-3 898 (900-3)		

ELEV 142

TDZE 135

MIRL Rwy 16-34

REIL Rwy 16

REIL Rws 11 and 29

91

5332 X 100

3498 X 75

34

342°

186

FAF to MAP 4.7 NM

Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34