
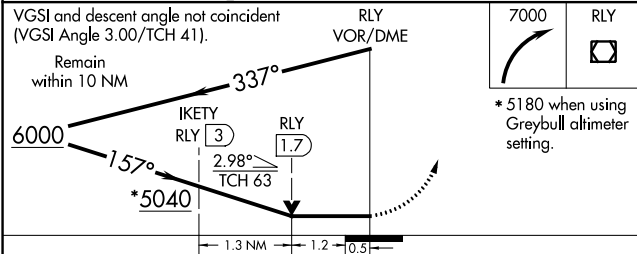


|             |         |          |      |
|-------------|---------|----------|------|
| VOR/DME RLY | APP CRS | Rwy Idg  | 7000 |
| 114.8       | 157°    | TDZE     | 4202 |
| Chan 95     |         | Apt Elev | 4252 |

VOR RWY 16  
WORLAND MUNI (WRL)

|                                                                                                                                                                                                                                                                 |                                                                                                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| <p><b>⚠</b> When local altimeter setting not received, use Greybull altimeter setting: increase all MDAs 140 feet; all Cats, and Circling Cat C/D visibilities ½ SM. Helicopter visibility reduction below ¾ SM NA. VDP NA with Greybull altimeter setting.</p> | <p><b>MISSED APPROACH:</b><br/>Climbing right turn to 7000 in RLY VOR/DME holding pattern.</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|

|                 |                                  |                                  |
|-----------------|----------------------------------|----------------------------------|
| ASOS<br>135.475 | SALT LAKE CENTER<br>133.25 285.6 | UNICOM<br>123.05 (CTAF) <b>1</b> |
|-----------------|----------------------------------|----------------------------------|

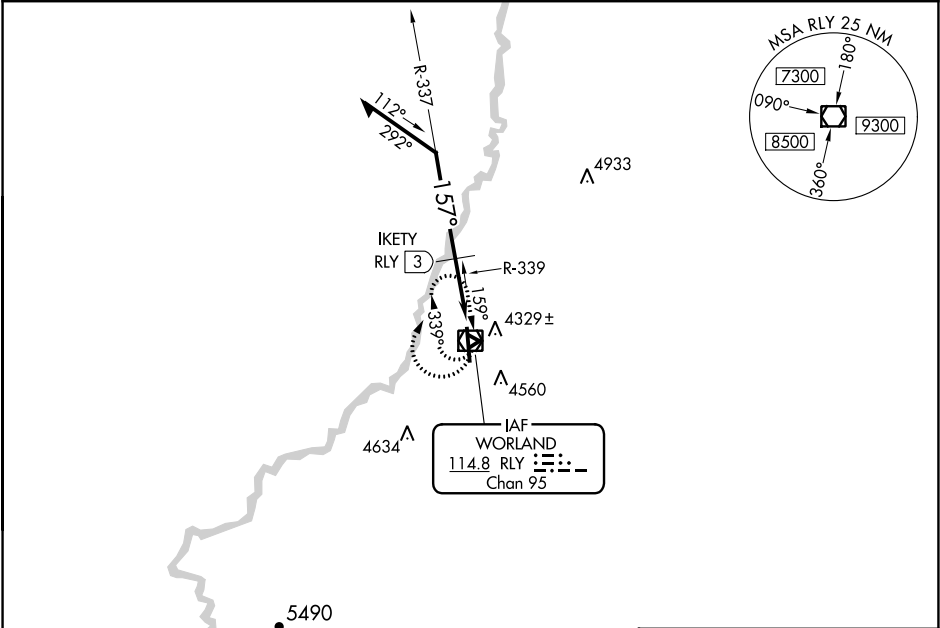

| CATEGORY           | A                     | B                       | C                       | D                       |
|--------------------|-----------------------|-------------------------|-------------------------|-------------------------|
| S-16               | 5040-1<br>838 (800-1) | 5040-1¼<br>838 (800-1¼) | 5040-2½                 | 838 (800-2½)            |
| CIRCLING           | 5040-1<br>788 (800-1) | 5040-1¼<br>788 (800-1¼) | 5040-2½                 | 788 (800-2½)            |
| IKETY FIX MINIMUMS |                       |                         |                         |                         |
| S-16               | 4600-1                | 398 (400-1)             | 4600-1¼                 | 398 (400-1¼)            |
| CIRCLING           | 4920-1                | 668 (700-1)             | 4920-1¾<br>668 (700-1¾) | 5020-2½<br>768 (800-2½) |

