
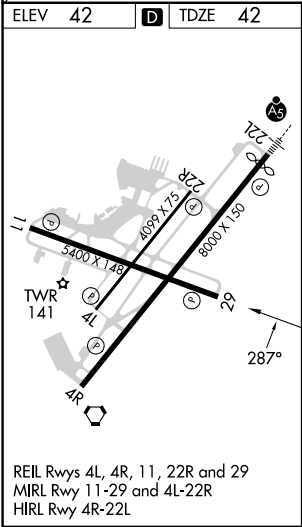


WAAS CH 45703 W29A	APP CRS 287°	Rwy ldg 5400 TDZE 42 Apt Elev 42
--	------------------------	---

RNAV (GPS) RWY 29
LAFAYETTE RGNL/PAUL FOURNET FLD (L.F'T')

RNP APCH.				MISSED APPROACH: Climb to 2800 direct SUVDE and on track 273° to RAYNE and hold.	
Rwy 29 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C.					
ATIS 134.05	LAFAYETTE APP CON ★ 121.1 363.0	LAFAYETTE TOWER ★ 118.5 (CTAF) 0 257.8	GND CON 121.8	CLNC DEL 125.55	UNICOM 122.95

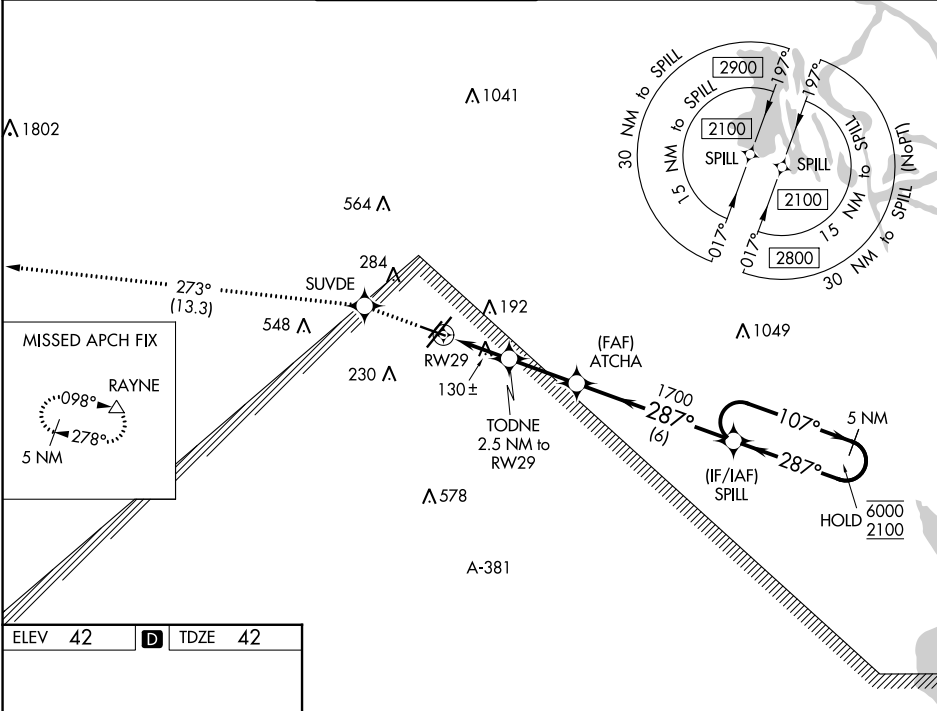

2800	SUVDE	fr 273°	RAYNE	5 NM Holding Pattern
*LNAV only. TODNE 2.5 NM to RW29. ATCHA 1700. *0.9 NM to RW29. *880. 1700. 287°. 107°. 6000. 2100. GP 3.00° TCH 51.				
0.9 1.6 2.6 NM 6 NM				
CATEGORY	A	B	C	D
LPV DA	292-¾	250 (300-¾)		
LNAV/VNAV DA	292-¾	250 (300-¾)		
LNAV MDA	380-1	338 (400-1)		
CIRCLING	500-1 458 (500-1)	580-1 538 (600-1)	700-1¾ 658 (700-1¾)	700-2 658 (700-2)