

NA



ASR

For inop ALS, increase S-LOC 36 Cats C/D visibility to 1½ SM.
**RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1400 then climbing left turn to 2500 direct GRB VORTAC and hold.

ATIS 124.1	GREEN BAY APP CON ★ 119.4 338.2	GREEN BAY TOWER ★ 118.7 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.75
---------------	------------------------------------	---	------------------	--------------------

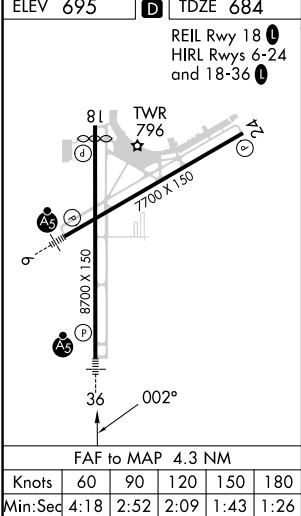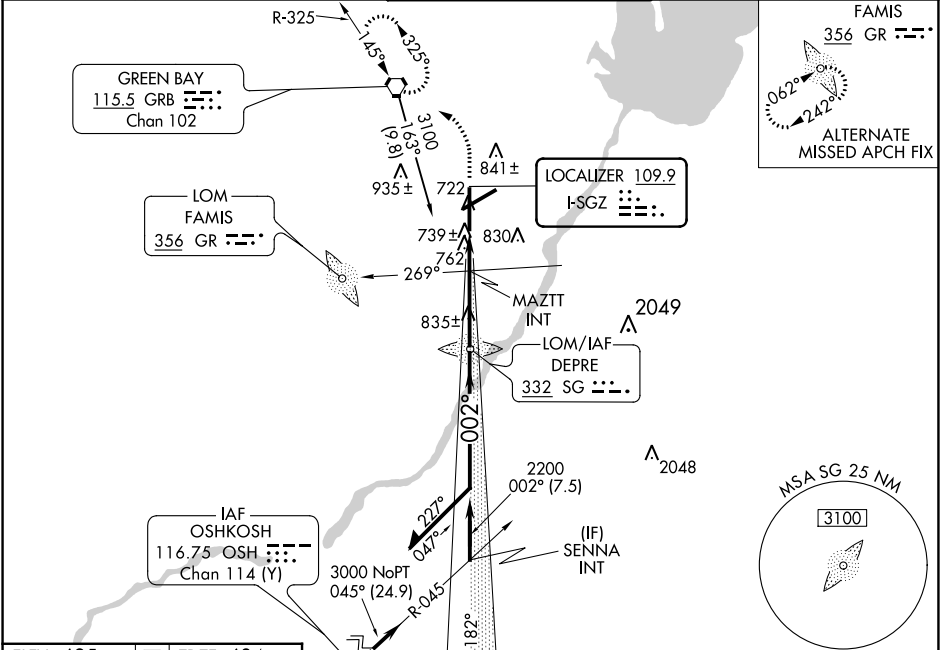

1400 2500 GRB				
*LOC only				
SG LOM 3100 2116 182° 2700 002° 2200				
Remain within 10 NM				
MAZTT INT 1200 1.5 NM 2.8 NM				
GS 3.00° TCH 50				
CATEGORY	A	B	C	D
S-ILS 36	**884/24 200 (200-½)			
S-LOC 36	1200/24	516 (600-½)	1200/55	516 (600-1)
CIRCLING	1200-1	505 (600-1)	1300-1¾ 605 (700-1¾)	1300-2 605 (700-2)
MAZTT FIX MINIMUMS				
S-LOC 36	1020/24	336 (400-½)	1020/26	336 (400-½)
CIRCLING	1200-1	505 (600-1)	1200-1½ 505 (600-1½)	1260-2 565 (600-2)

EC-3, 18 APR 2024 to 16 MAY 2024

EC-3, 18 APR 2024 to 16 MAY 2024