


WAAS CH 78099 W15A	APP CRS 153°	Rwy Idg TDZE Apt Elev	9997 1015 1015
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 15

ROBERT GRAY AAF (GRK)

RNP APCH - GPS.			MALSR	MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct AGJ VORTAC and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Circling NA west of Rwy 15-33. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1 3⁄8 SM and LNAV Cats C/D/E visibility to 1 3⁄8 SM. # RVR 1800 authorized with the use of FD or AP or HUD to DA.			ASR/PAR	

ATIS 124.9	GRAY APP CON 120.075 323.15	GRAY TOWER 120.75(CTAF) 285.5	GND CON 121.8 279.5	CLNC DEL 126.2 251.1
----------------------	---------------------------------------	---	-------------------------------	--------------------------------

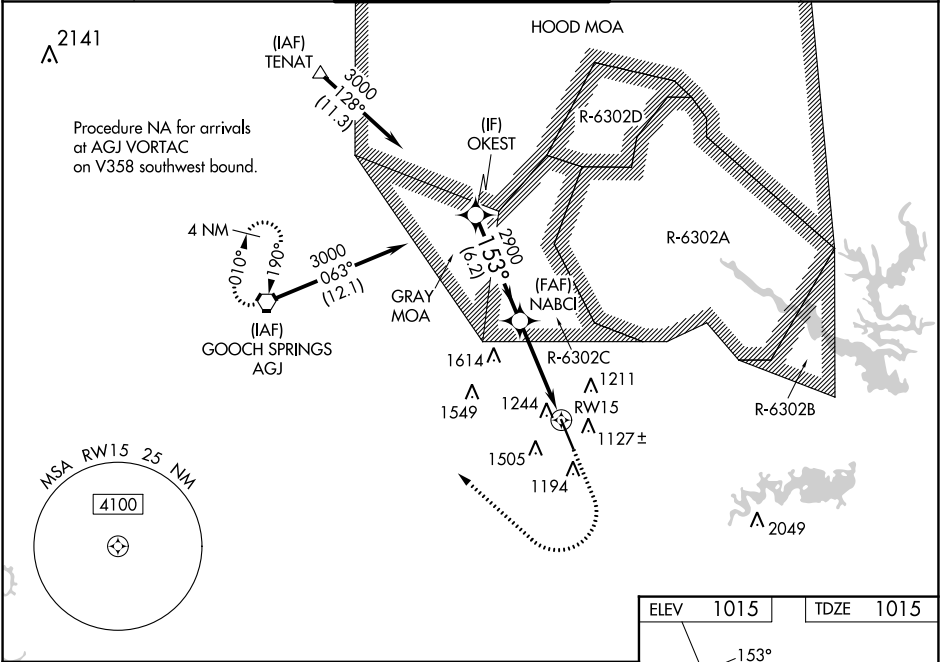

OKEST		NABCI		RW15	
3000		2900		2900	
GP 3.00°		TCH 53		*1.4 NM to RW15	
6.2 NM		4.4 NM		1.4 NM	
CATEGORY	A	B	C	D	E
LPV DA #	1215/24		200 (200-½)		
LNAV/VNAV DA	1531/55		516 (600-1)		
LNAV MDA	1520/24		505 (600-½)		
CIRCLING	1540-1		525 (600-1)		
	1560-1½		545 (600-1½)		
	1620-2		605 (700-2)		
	1740-2½		725 (800-2½)		

