


WAAS CH 72801 W12A	APP CRS 128°	Rwy Idg TDZE Apt Elev	8399 873 873
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 12

WATERLOO RGNL (A.L.O)

RNP APCH.	⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats to RVR 5500. # RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR ⬆ ⬆ ⬆ MISSED APPROACH: Climb to 3400 direct KUCTE and hold.
-----------	--	---

ATIS 120.65	WATERLOO APP CON★ 118.9 251.15	WATERLOO TOWER★ 125.075 (CTAF) 0 257.8	GND CON 121.9 269.1	UNICOM 122.95
-----------------------	--	--	-------------------------------	-------------------------

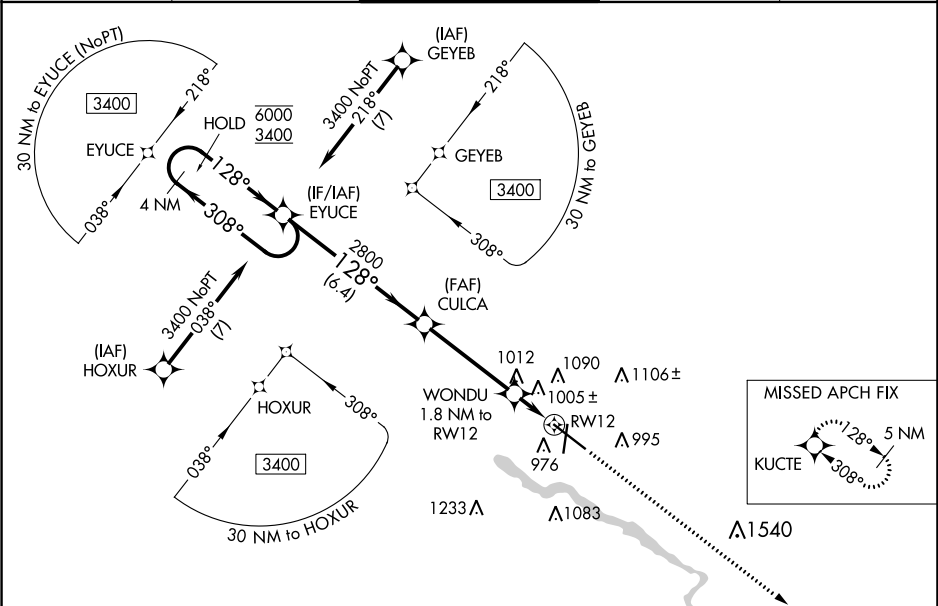

					ELEV 873	D	TDZE 873
4 NM Holding Pattern EYUCE CULCA WONDU 1.8 NM to RW12 KUCTE 3400 GP 3.00° TCH 55 6.4 NM 4.1 NM 0.8 NM 1 NM *1500 *1 NM to RW12 *LNAV only 128° to RW12 128° 308° 2800 2800 3400 6000					128° to RW12 81 923 8399 X 150 4003 X 150 36 TWR 977 A5 A4		
CATEGORY	A	B	C	D			
LPV DA#	1073/24 200 (200-½)						
LNAV/VNAV DA	1252/30 379 (400-¾)						
LNAV MDA	1260/24 387 (400-½)		1260/35 387 (400-¾)				
CIRCLING	1360-1 487 (500-1)	1400-1 527 (600-1)	1480-1¾ 607 (700-1¾)	1600-2¼ 727 (800-2¼)			